#### INSTALLATION INSTRUCTION

### H/L/J Track Wall Mount Suspension Bracket

#### **TBKT**

# WAC LIGHTING Responsible Lighting®


#### **SAFETY INSTRUCTIONS:**


- 1. Read all of these instructions before installing the track system.
- 2. Turn off power at main switch before installing or modifying the system.
- 3. Do not install within six inches of any curtain or combustible materials.
- 4. Do not install less than 5 feet above a floor.
- 5. Do not install in damp or wet locations.
- 6. Do not connect a track to more than one branch circuit.
- 7. Do not exceed 15lbs maximum weight for every 4 feet track length.
- 8. All installation shall be in accordance with NEC and all local codes.

#### **MOUNTING STEPS**

The track bracket extends 24 inches from the wall, for use with all line voltage tracks of WAC. Powered through a live end connector. Use a minimum of two brackets for 2 or 4 feet track, and three for 6 or 8 feet track.

- 1. Make sure power is off.
- 2. Hold the track bracket to the wall and mark the position of mounting holes. Space between brackets should align with pre-drilled holes on the track.
- 3. Secure the plastic wall anchor into the marked location of the wall.
- 4. Hold the track bracket vertically and secure on wall with screws provided.
- 5. Raise the track to brackets and secure track to bracket with toggle bolts provided.
- 6. If additional holes in track are needed, drill 3/16 inch holes through the centerline of track (Additional holes must be at least 6 inches from end of track.).
- 7. Fully tighten toggle bolts after all electrical connections are made.



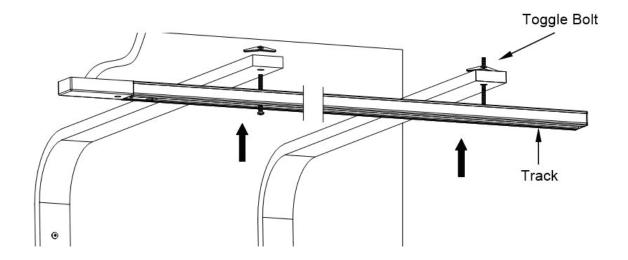

### INSTALLATION INSTRUCTION

## H/L/J Track Wall Mount Suspension Bracket

**TBKT** 

## WAC LIGHTING

Responsible Lighting®

