


TUBE ARCHITECTURAL DS-PD05

LED Pendant Mounts

WAC LIGHTING

Responsible Lighting®

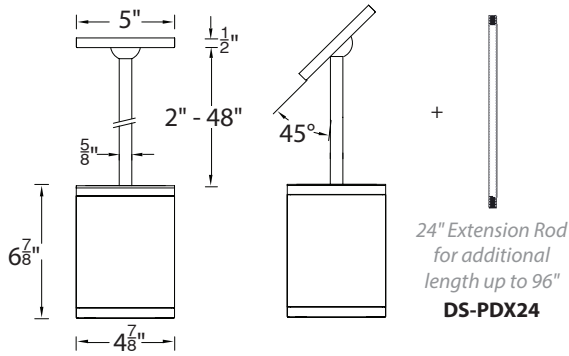

Seismic swivel tilts up to 45° to accommodate sloped ceiling

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent lighting. Comes in various light beam angle options.

FEATURES

- High performance exterior rated LED pendant
- Includes 45° swivel canopy and 2 field cuttable 24" rods
- Solid aluminum construction
- 39° visual cutoff angle for glare control
- 5 year warranty

SPECIFICATIONS

- Input:** Universal voltage 120V - 277VAC, 50/60Hz
- Dimming:** Electronic low voltage (ELV) : 100% - 5% (120V only)
0-10V: 100% - 1% (120-277V)
- Light Source:** High output 3 Step Mac Adam Ellipse COB
Rated life of 60,000 hours at L70
- Finish:** Electrostatically powder coated, white, black, bronze and graphite
- Standards:** IP65 rated, ETL & cETL wet location listed, Energy Star® 2.0 rated (labeled with *)
- Operating Temp:** -13°F to 122°F (-25°C to 50°C)

ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Lumen	CBCP	Efficacy (Lm/W)	Light Distribution	Finish
DS-PD05	5" 27W	S Spot	18°	927 2700K	90	1680	8526	62		BK Black WT White BZ Bronze GH Graphite
				27* 2700K	85	1800	9151	67		
				930 3000K	90	1700	8639	63		
				30* 3000K	85	1995	10126	74		
				35* 3500K	85	2190	11118	81		
				40* 4000K	85	2260	11483	84		
		N Narrow	25°	927 2700K	90	1730	5513	64		
				27* 2700K	85	1855	5918	69		
				930 3000K	90	1750	5587	65		
				30* 3000K	85	2055	6548	76		
				35* 3500K	85	2255	7190	84		
				40* 4000K	85	2330	7426	86		
		F Flood	33°	927 2700K	90	1725	4246	64		
				27* 2700K	85	1850	4557	69		
				930 3000K	90	1745	4302	65		
				30* 3000K	85	2045	5043	73		
				35* 3500K	85	2245	5537	83		
				40* 4000K	85	2320	5719	86		

DS-PD05-_____ - _____

Example: DS-PD05-S930-WT

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760






TUBE ARCHITECTURAL DS-PD05

LED Pendant Mounts

WAC LIGHTING

Responsible Lighting®

MOUNTING ACCESSORIES

	<i>Extension Rod</i>	DS-PDX24	<i>One 24" extension rod for DS-PDSK Can be field cut</i>	Finish	
				BK <i>Black</i>	
				WT <i>White</i>	
				BZ <i>Bronze</i>	
				GH <i>Graphite</i>	

Example: **DS-PDX24-WT**

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122


Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

TUBE ARCHITECTURAL DS-PD06

LED Pendant Mounts

WAC LIGHTING

Responsible Lighting®

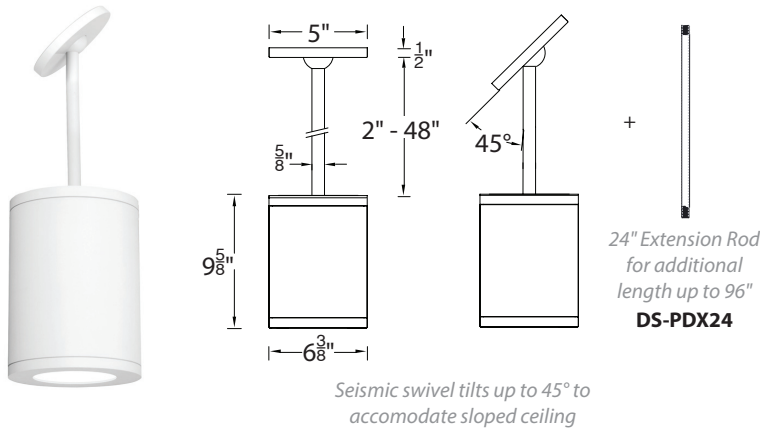

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent lighting. Comes in various light beam angle options.

FEATURES

- High performance exterior rated LED pendant
- Includes 45° swivel canopy and 2 field cuttable 24" rods
- Solid aluminum construction
- 38° visual cutoff angle for glare control
- 5 year warranty

SPECIFICATIONS

Input:	Universal voltage 120V - 277VAC, 50/60Hz
Dimming:	Electronic low voltage (ELV) : 100% - 5% (120V only) 0-10V: 100% - 1% (120-277V)
Light Source:	High output 3 Step Mac Adam Ellipse COB Rated life of 70,000 hours at L70
Finish:	Electrostatically powder coated, white, black, bronze and graphite
Standards:	IP65 rated, ETL & cETL wet location listed, Energy Star® 2.0 rated (labeled with *)
Operating Temp:	-13°F to 122°F (-25°C to 50°C)

ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Lumen	CBCP	Efficacy (Lm/W)	Light Distribution	Finish	
DS-PD06	6" 36W	S Spot	19°	927	2700K	90	1875	8911	51		BK Black WT White BZ Bronze GH Graphite
				27*	2700K	85	2400	11392	65		
				930	3000K	90	2000	9500	54		
				30*	3000K	85	2170	10317	59		
				35*	3500K	85	2500	11884	68		
		40*	4000K	85	2450	11639	66				
		N Narrow	30°	927	2700K	90	1830	4642	49		
				27*	2700K	85	2340	5935	63		
				930	3000K	90	1950	4949	53		
				30*	3000K	85	2120	5374	57		
				35*	3500K	85	2440	6191	66		
		40*	4000K	85	2390	6063	65				
		F Flood	40°	927	2700K	90	1840	3310	50		
				27*	2700K	85	2355	4231	64		
				930	3000K	90	1965	3528	53		
30*	3000K			85	2130	3832	58				
35*	3500K			85	2455	4414	66				
40*	4000K	85	2405	4323	65						

DS-PD06-_____-____-

Example: DS-PD06-S930-WT

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760



TUBE ARCHITECTURAL DS-PD06

LED Pendant Mounts

WAC LIGHTING

Responsible Lighting®

MOUNTING ACCESSORIES

	<i>Extension Rod</i>	DS-PDX24	<i>One 24" extension rod for DS-PDSK Can be field cut</i>	Finish	
				BK <i>Black</i>	
				WT <i>White</i>	
				BZ <i>Bronze</i>	
				GH <i>Graphite</i>	

Example: **DS-PDX24-WT**

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122


Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

TUBE ARCHITECTURAL DS-PD08

LED Pendant Mounts

WAC LIGHTING

Responsible Lighting®

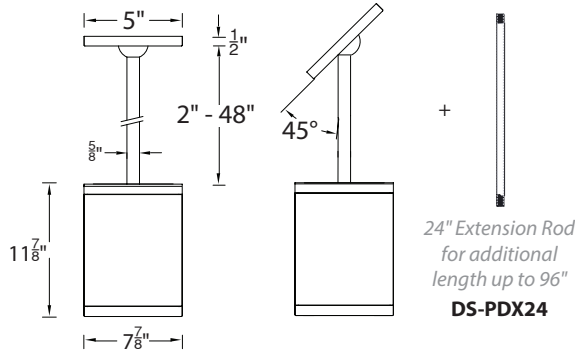

Seismic swivel tilts up to 45° to accommodate sloped ceiling

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

FEATURES

- High performance exterior rated LED pendant
- Includes 45° swivel canopy and 2 field cuttable 24" rods
- Solid aluminum construction
- 43° visual cutoff angle for glare control
- 5 year warranty

SPECIFICATIONS

- Input:** Universal voltage 120V - 277VAC, 50/60Hz
- Dimming:** Electronic low voltage (ELV) : 100% - 5% (120V only)
0-10V: 100% - 1% (120-277V)
- Light Source:** High output 3 Step Mac Adam Ellipse COB
Rated life of 80,000 hours at L70
- Finish:** Electrostatically powder coated, white, black, bronze and graphite
- Standards:** IP65 rated, ETL & cETL wet location listed, Energy Star® 2.0 rated (labeled with *)
- Operating Temp:** -13°F to 122°F (-25°C to 50°C)

ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Lumen	CBCP	Efficacy (Lm/W)	Light Distribution	Finish	
DS-PD08	8" 48W	S Spot	18°	927	2700K	90	3075	11830	64		BK Black WT White BZ Bronze GH Graphite
				27*	2700K	85	3540	13616	74		
				930	3000K	90	2975	11443	62		
				30*	3000K	85	3615	13904	75		
				35*	3500K	85	3855	14822	80		
				40*	4000K	85	3915	15054	82		
		N Narrow	21°	927	2700K	90	3075	16383	64		
				27*	2700K	85	3540	18857	74		
				930	3000K	90	2975	15847	62		
				30*	3000K	85	3615	19255	75		
				35*	3500K	85	3855	20526	80		
				40*	4000K	85	3915	20847	82		
		F Flood	34°	927	2700K	90	3035	6200	63		
				27*	2700K	85	3495	7136	73		
				930	3000K	90	2935	5997	61		
				30*	3000K	85	3570	7287	74		
				35*	3500K	85	3805	7768	79		
				40*	4000K	85	3865	7890	81		

DS-PD08-_____-_____-

Example: DS-PD08-S930-WT

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760


TUBE ARCHITECTURAL DS-PD08

LED Pendant Mounts

WAC LIGHTING

Responsible Lighting®

MOUNTING ACCESSORIES

	<i>Extension Rod</i>	DS-PDX24	<i>One 24" extension rod for DS-PDSK Can be field cut</i>	Finish	
				BK <i>Black</i>	
				WT <i>White</i>	
				BZ <i>Bronze</i>	
				GH <i>Graphite</i>	

Example: **DS-PDX24-WT**

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760