

# DOT - 6", 9", 12" & 15" Interior/Exterior LED Ceiling & Wall Mount

FM-W57806, FM-W57809, FM-W57812, FM-W57815

# dweLED

by WAC Lighting



Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## PRODUCT DESCRIPTION

Optimal diffuser amplifies the brightness on this durable waterproof outdoor flush mount.

## FEATURES

- Weather-resistant 316 stainless steel body
- Lightweight, injection molded, UV-rated acrylic diffuser enhances brightness, safety lock prevent slippage
- No transformer or driver needed
- 277V option available for 9", 12" & 15" sizes (special order)
- Color Temperature: 3000K, 3500K
- CRI: 90
- Rated Life: 50,000 hours\*\*

## SPECIFICATIONS

**Construction:** Stainless steel with acrylic diffuser


**Input:** 120V (277V special order)

**Dimming:** 100% - 10% ELV

**Light Source:** High output LED

**Finish:** Stainless Steel (SS), Black (BK)

**Standards:** ETL/ cETL, Wet location listed, JA8 2016 Title 24 Compliant, ADA compliant, Energy Star® rated

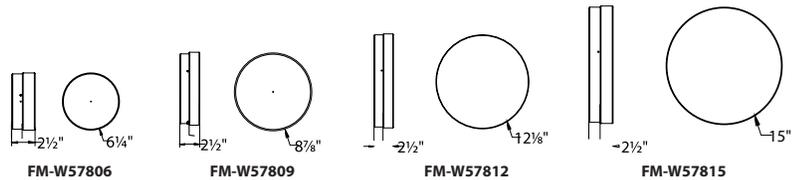

## ORDER NUMBER

Model	Size	Watt	LED Lumens	Delivered Lumens	Finish
<b>FM-W57806</b>	6"	10W	791	535	<b>SS</b> Stainless Steel <b>BK</b> Black
<b>FM-W57806</b>		10W	859	581	
<b>FM-W57809</b>	9"	17W	1542	939	
<b>FM-W57809</b>		17W	1674	1019	
<b>FM-W57812</b>	12"	26W	2315	1376	
<b>FM-W57812</b>		26W	2513	1499	
<b>FM-W57815</b>	15"	27W	2934	1654	
<b>FM-W57815</b>		27W	3185	1796	

Example: **FM-W57809-30-SS**

For 277V special order, add an "F" before the color temperature: **FM-W5780F-30-SS**

dweLED.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760