
## **SILO X10** - model: 2010

### H/L/J Track Luminaire

# WAC LIGHTING

## Responsible Lighting®

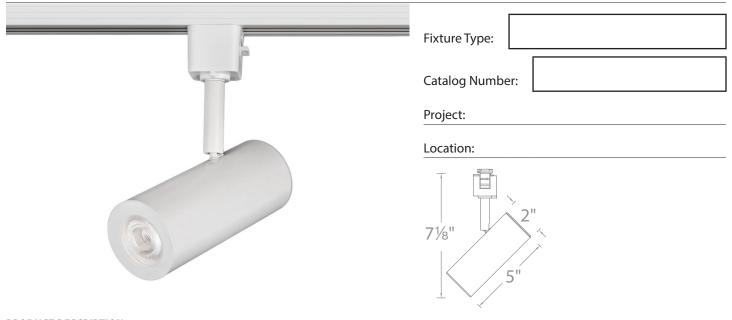

#### PRODUCT DESCRIPTION

Silo offers superior light output in a small, sleek design. Engineered synthesis of driver, single point source LED, optical and thermal management in a slender diecast housing. Ideal for residential, retail and lower mounting height commercial applications.

#### FEATURES SPECIFICATIONS

- · 35° TIR lens pre-installed. 25° TIR lens included
- Integral driver and high output COB LED
- Outperforms halogen 65W MR16
- Accommodates one flat lens accessory or one glare control accessory
- 350° horizontal and 90° vertical aiming
- 50,000 hour rated life
- · 5 year WAC Lighting product warranty

- Construction: Die-cast aluminum with removable front cap for lenses or
  - accessories

**Input:** 120VAC 50/60Hz

Power: 10W

**GLARE CONTROL** 

Snoot - White

**Light Source:** High output COB LED

**Dimming:** 100%-5% electronic low voltage (ELV) dimmer

Standards: UL & cUL Listed, Energy Star®

Finish: Powder coated Black and White.

Anodized Brushed Nickel and Brushed Brass

LENS-11-SNOOT-WT

#### ORDER NUMBER

Track	Model	Beam	Lumens	CBCP	Color Temp	CRI	Finish
H H Track L L Track J J/J2 Track	2010	25° 35°	790 790	2575 1545	<b>930</b> <i>3000K</i>	90	BK Black BN Brushed Nickel BR Brushed Brass DB Dark Bronze WT White

-2010-930-

Example: H-2010-930-BK

#### FLAT LENS FLAT LENS

LENS-11-AMB
LENS-11-BLU
LENS-11-GRN
LENS-11-RED
LENS-11-YEL

Frosted	LENS-11-FR
Spread	LENS-11-SPR
Beam elongating	LENS-11-BEL

Cross louver - Black	LENS-11P-CRL-BK
Cross louver - Brushed Nickel	LENS-11P-CRL-BN
Cross louver - White	LENS-11P-CRL-WT
Snoot - Black	LENS-11-SNOOT-BK
Snoot - Brushed	LENS-11-SNOOT-BN

#### WAC Lighting www.waclighting.com Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center 44 Harbor Park Drive • Port Washington, NY 11050 Phone (516) 515.5000 • Fax (516) 515.5050 **Western Distribution Center** 1750 Archibald Avenue • Ontario, CA 91760 Phone (800) 526.2588 • Fax (800) 526.2585

1