


Model: HM1-LED208

AC LED Track Luminaire

WAC LIGHTING

Responsible Lighting®

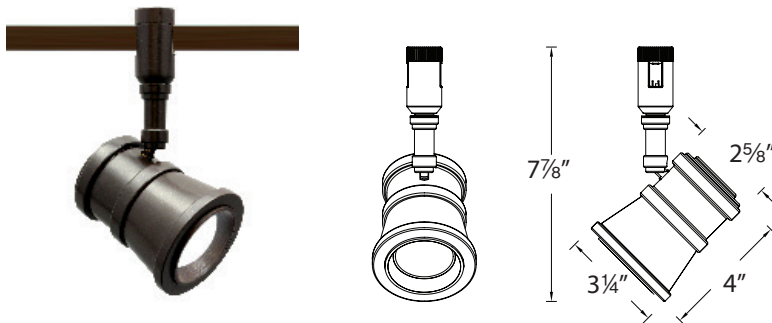

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION


LED208 track luminaire offers driverless AC LED technology and easy change of beam angles in field. Superior light output in a small, unobtrusive design. The high output LEDs outperform halogen 50W MR16. Developed for upscale residential and commercial environments.

FEATURES

- Driverless AC LED technology
- Compact integrated design
- Easy change of beam angles in field
- Outperforms halogen 50W MR16
- Consistent high quality beam pattern
- Accommodates 1 lens accessory
- 360° horizontal and 90° vertical aiming
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

BEAMSHIFT™ TECHNOLOGY

LED208 track luminaires come with BeamShift™, allowing in-field change of beam angle simply by changing the location of the lens with a simple flat-head screwdriver.

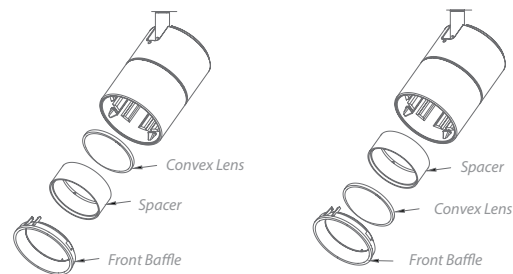

Flood 40° Configuration
Convex Lens located behind the spacer

Spot 15° Configuration
Convex Lens located in front of the spacer.

SPECIFICATIONS

Construction: Die-cast aluminum with removable PC lens cap for easy change of lenses or accessories

Finish: Dark Bronze (DB)

Driver: Input voltage: 120VAC 50/60Hz.

Light Source: High Voltage AC LED module.

Dimming: Dims to 10%-100% with electronic low voltage (ELV) dimmer. Reference dimming report on website for compatibility.

Standards: ETL & cETL Listed.

ORDER NUMBER

Track System	Model	Finish	Voltage	Color Temp	Power	CRI	Beam	Lumens	Efficacy
HM1 Flexrail1™	LED208-30	DB Dark Bronze	120V	3000K	15W	90	15°	600	40 Lm/W
							40°	750	50 Lm/W

FINISHES



HM1 - **LED208-30** - **DB**

LENSES & ACCESSORIES

Model	Color
LENS-16 Color Lens	AMB Amber
	BLU Blue
	GRN Green
	RED Red
	YEL Yellow

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

Model: HM1-LED208

AC LED Track Luminaire


WAC LIGHTING

Responsible Lighting®

Application Performance

Beam represents the angle at which light intensity is 50% of CBCP and is measured by **L** and **W**. Footcandle (**FC**) levels are observed at the beam's center and depend on mounting distance (**D**) and aiming angle (**A**).

- D** Distance (ft)
- C** Distance to Beam Center (ft)
- FC** Footcandles
- L** Beam Length (ft)
- W** Beam Width (ft)
- A** Aiming Angle
- CBCP** Center Beam Candle Power

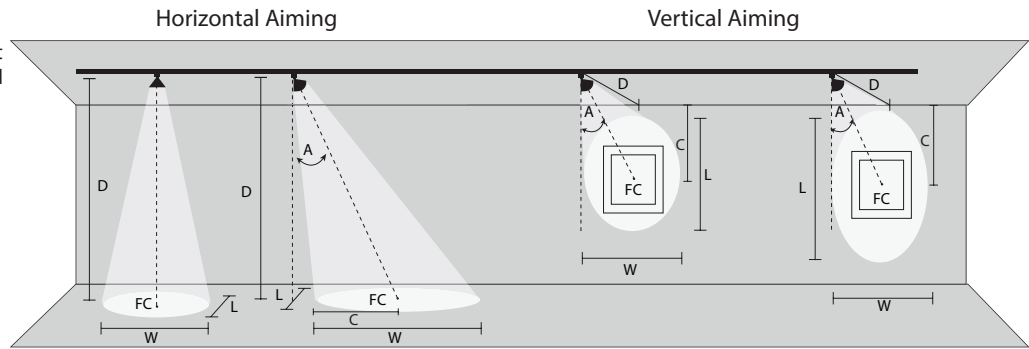

Model	Beam	CBCP	Horizontal A = 0°				Horizontal A = 30°					Vertical A = 30°					Vertical A = 45°				
			D	FC	L	W	D	FC	L	W	C	D	FC	L	W	C	D	FC	L	W	C
LED208-30	15°	3525	6'	98	1.6'	1.6'	6'	64	1.8'	2.1'	3.5'	2'	110	2.2'	1.1'	3.5'	2'	312	1.1'	0.7'	2'
			7'	72	1.8'	1.8'	7'	47	2.1'	2.5'	4'	2.5'	71	2.8'	1.3'	4.3'	2.5'	199	1.3'	0.9'	2.5'
			8'	55	2.1'	2.1'	8'	36	2.4'	2.8'	4.6'	3'	49	3.3'	1.6'	5.2'	3'	138	1.6'	1.1'	3'
			9'	44	2.4'	2.4'	9'	28	2.7'	3.2'	5.2'	3.5'	36	3.9'	1.8'	6.1'	3.5'	102	1.9'	1.3'	3.5'
			10'	35	2.6'	2.6'	10'	23	3'	3.5'	5.8'	4'	28	4.4'	2.1'	6.9'	4'	78	2.1'	1.5'	4'
LED208-30	40°	1620	6'	45	4.4'	4.4'	6'	29	5'	6.1'	3.5'	2'	51	9.7'	2.9'	3.5'	2'	143	3.4'	2.1'	2'
			7'	33	5.1'	5.1'	7'	21	5.9'	7.1'	4'	2.5'	32	12.1'	3.6'	4.3'	2.5'	92	4.2'	2.6'	2.5'
			8'	25	5.8'	5.8'	8'	16	6.7'	8.1'	4.6'	3'	23	14.5'	4.4'	5.2'	3'	64	5'	3.1'	3'
			9'	20	6.6'	6.6'	9'	13	7.6'	9.1'	5.2'	3.5'	17	16.9'	5.1'	6.1'	3.5'	47	5.9'	3.6'	3.5'
			10'	16	7.3'	7.3'	10'	11	8.4'	10.2'	5.8'	4'	13	19.3'	5.8'	6.9'	4'	36	6.7'	4.1'	4'

waclighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760