


FLEXRAIL2™ – EXCLUSIVE PENDANT

SERIES HM-PLD-G415

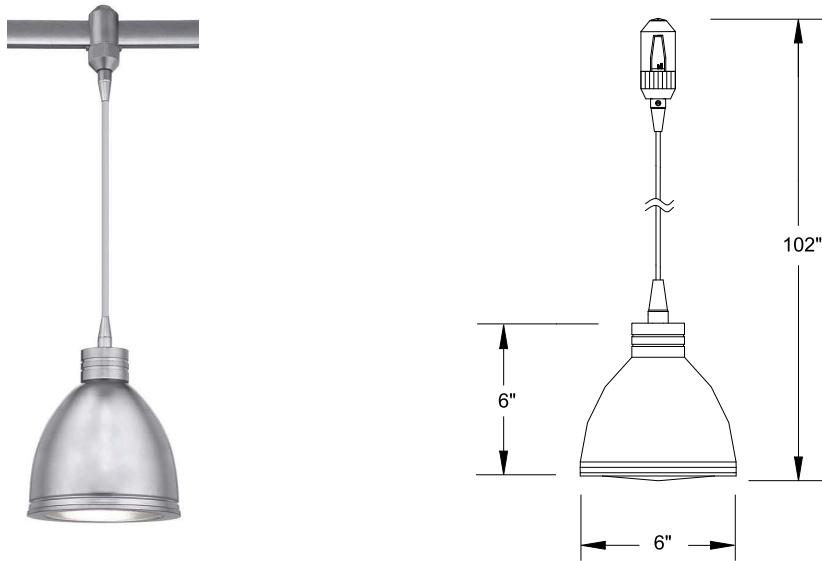

Ordering Matrix

Model	Finish	Lamp Options
HM-PLD-G415	PT DB	A19 PAR20 PAR30

Ordering Example (*model number - finish*): HM-PLD-G415-PT

Product Details

Description: Line voltage pendant for use with the Flexrail2™ track system. Comes complete with cord set, track adaptor, and metal shade with convex glass diffuser lens.

Materials: Flexrail2™ adaptor is die-cast aluminum with polycarbonate center connection cover. Shade is painted aluminum. Metal shade holder is painted machined brass. Pendant cord is SVT cord.

Lamping: Medium base socket uses incandescent A or PAR style lamps.
A19 lamp - 100W maximum.
PAR20 lamp - 50W maximum.
PAR30 lamp - 75W maximum.

Finish: Metal parts are painted in an abrasion resistant platinum or designer bronze finish.
Platinum (PT) finish socket set comes with a clear cord.
Dark Bronze (DB) finish socket set comes with a clear cord.

Listing: UL & CUL Listed.

Specification Features

- HM-PLD-415 is a modern styled track pendant exclusively for use with the Flexrail2 rail system by WAC Lighting.
- The standard line voltage pendant cord is 96" long. The SVT cord can be field shortened to desired length at the socket end of connection.
- The HM-PLD-415 is dimmable with any incandescent dimmer switch that uses a grounded neutral connection. The Flexrail2™ circuit with the HM-PLD-415 should only be shared with other incandescent fixtures if you are planning on dimming.
- 5 year product warranty.