
HR-D425

4" Low Voltage Downlight Trim

WAC LIGHTING

Responsible Lighting®

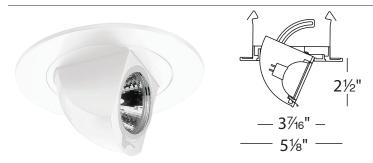

Fixture Type:	
Catalog Number:	
Project:	

PRODUCT DESCRIPTION

Periscope style recessed adjustable trim. For use with HR-8400 series low voltage housings.

FEATURES

- Directional spot, 80° adjustment from vertical recessed downlight
- Center lamp holder allows lamp to be tilted up to 80° from vertical
- The supplied clear glass lens can be replaced with one lens accessory
- Handles surfaces up to 3/4" thick
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Location:

Construction: Durable die-cast aluminum construction. Three heavy gauge retention clips firmly hold trim to housing. Trim is furnished with special socket and ceramic terminal block, to be used in place of the downlight housing socket.

Lamp: Accommodates most 12V LED MR16 or Halogen MR16 lamps (50W max).

Finish: Abrasion resistant powder coat painted finish. Available in White (WT).

Standards: UL & CUL Listed, Suitable for damp locations

ORDER NUMBER

Model #	Finish
HR-D425	
(Order lamp separately)	14//- :
HR-D425LED	WT White
(7W 450lm LED MR16 included,)
Model #	Finish

HR-D425 -			
Model # Fin	ish		
(7W 450lm LED MR16 included)			
HR-D425LED	VVI	White	
(Order lamp separately)	wT	M/bita	
1111-0423			

ACCESSORIES

LENS-16- Color Lens	AMB BLU GRN RED	Blue	LENS-16-UVF LENS-16-FR LENS-16-SPR LENS-16-BEL	UV Filter Frosted Lens Spread Lens Beam Elongating Lens
	YEL	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	LENS-16-HCL	Honeycomb Louver
		70011		

Example: HR-D425LED-WT

4" Low Voltage Ho	ousings (Required)		Model	Voltage	Transformer	Output	Installation	Rating
	4½" ————————————————————————————————————	5%e" 81%e"	HR-8402E	120V	Electronic	12V, 50W max	New Construction	Non-IC
	45/16" 139/16"	4¼"	HR-8401E	120V	Electronic	12V, 50W max	Remodel	Non-IC

Non-IC housings require 3" of clearance from insulation on all sides. Accommodates ceiling thickness of up to 3/4" for remodel & 3/4" for new construction.