
HR-LED431 4" LEDme[®] Lensed Trim

WAC LIGHTING

Responsible Lighting®

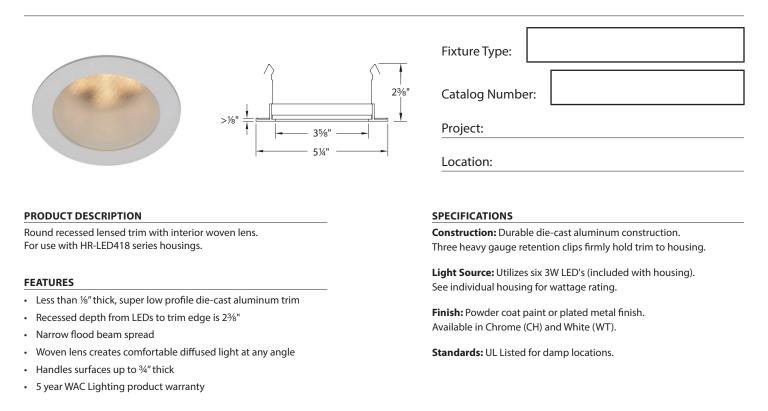


FINISHES CH

WТ

ORDER NUMBER

Model #	Finish	Trim
HR-LED431	СН	Chrome
	WT	White



Example: HR-LED431-WT

COMPATIBLE HOUSINGS (ORDER SEPARATELY)

Rating	Model #	Installation	Color Temp		Watt	Lumens	CRI	Input	Current	Dimensions			Cutout	
IC-Rated	HR-LED418-NIC	New Contruction	27 30	2700K 3000K	10.21	10 214/	639 639	85 85	120V	450	L: 14½-24½"	W: 6¾"	H: 5½"	43⁄8"
	HR-LED418-RIC	Remodel	35 40	3500K 4000K		10.200	681 815	80 75	50/60Hz	450mA	L: 11%"	W: 63⁄8"	H: 5%"	43⁄8"
Non-IC	HR-LED418-N	New Contruction	27 30	2700K 3000K		16W	846 846	85 85	120V 50/60Hz 700	700	L: 14½-24½"	W: 6¾"	H: 5½"	43⁄8"
	HR-LED418-R	Remodel	35 40	3500K 4000K			901 1135	80 75		700mA	L: 11%"	W: 6¾"	H: 5%"	43⁄8"
Non-IC	HR-LED418-N	New Contruction Emergency Backup Battery	27 30 35 40	2700K 3000K 3500K 4000K	EM	16W	846 846 901 1135	85 85 80 75	120V 50/60Hz	700mA	L: 14½-24½"	W: 11½"	H: 5½"	43⁄8"

Example: HR-LED418-NIC-27 or HR-LED418-NIC-27-EM

See individual housing spec sheets for complete information.

WAC Lighting www.waclighting.com Phone (800) 526.2588 • Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive • Port Washington, NY 11050 Phone (516) 515.5000 • Fax (516) 515.5050 **Western Distribution Center** 1750 Archibald Avenue • Ontario, CA 91760 Phone (800) 526.2588 • Fax (800) 526.2585

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. JUN 2018

PHOTOMETRY

