


HR3LEDT418P

3.5" Tesla™ Pro LED 30°-45° Adjustable Trim

WAC LIGHTING

Responsible Lighting®

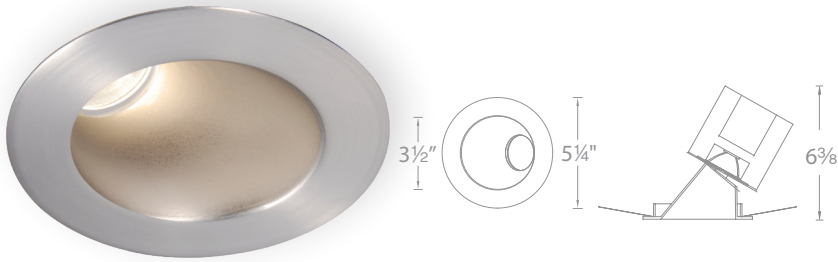

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Minimum profile, round 30° to 45° adjustable trim with interior open reflector.

FEATURES

- 3.5" aperture
- Damp location listed
- 30° visual cutoff angle for glare control
- Adjustable fixtures are ideal for sloped ceiling applications
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Durable die-cast aluminum construction with borosilicate glass lens. Extruded aluminum heat sink.

Power Consumption: 21.5W


Dimming: 0-10V Dimming: 100%-10%
ELV Dimming: 100%-15% (120V only)

Mounting: Two heavy gauge retention clips hold trim firmly to housing.

Finish: Powder coated white
Electroplated brushed nickel and copper bronze

Standards: ETL & cETL Listed.

TRIMS

Model#	Beam	Color Temp	CRI	Lumens	CBCP	Finish
HR3LEDT418P <i>30° to 45° Adjustable</i>	N 26°	827 2700K	85	1010	2803	BN <i>Brushed Nickel</i> CB <i>Copper Bronze</i> WT <i>White</i> 
		927 2700K	90	860	2407	
		830 3000K	85	1050	2860	
		930 3000K	90	960	2687	
		835 3500K	85	1145	3159	
		840 4000K	85	1165	3167	
	F 38°	827 2700K	85	975	1982	
		927 2700K	90	830	1688	
		830 3000K	85	1015	2056	
		930 3000K	90	925	1881	
		835 3500K	85	1105	2210	
		840 4000K	85	1120	2272	

HR3LEDT418P

Example: **HR3LEDT418PF835CB**

COMPATIBLE HOUSINGS *See individual housing spec sheets for complete information.*

New Construction

HR-3LED-H18D1-ICA <i>Narrow, IC-Rated, Airtight</i>	120V -277V	HR-3LED-H18D1-ICAC <i>Narrow, IC-Rated, Airtight Chicago Plenum</i>	120V -277V
HR-3LED-H18D-ICA <i>IC-Rated, Airtight</i>	120V -277V	HR-3LED-H18D-ICAC <i>IC-Rated, Airtight Chicago Plenum</i>	120V -277V
HR-3LED-H18D-EMICA <i>IC-Rated, Airtight Emergency Backup Battery</i>	120V	HR3LED-H18D-EMICAF <i>IC-Rated, Airtight Emergency Backup Battery</i>	277V

Remodel

HR-3LED-R22D <i>Non-IC</i>	120V -277V
--------------------------------------	------------

REPLACEMENT MODULES

Reflectors

<i>Narrow Flood</i>	SL-REF-BL10-1-N
<i>Flood</i>	SL-REF-BL10-1-F

LED

2700K (90 CRI)	BXRC-27G1000-B-23
2700K	BXRC-27E1000-B-23
3000K (90 CRI)	BXRC-30G1000-B-23
3000K	BXRC-30E1000-B-23
3500K	BXRC-35E1000-B-23
4000K	BXRC-40E1000-B-23

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760