
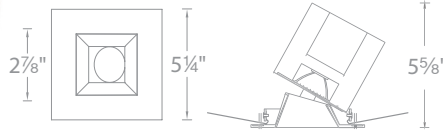


HR3LEDT518P

3.5" Tesla™ Pro LED Square 0-30° Adjustable

WAC LIGHTING

Responsible Lighting®

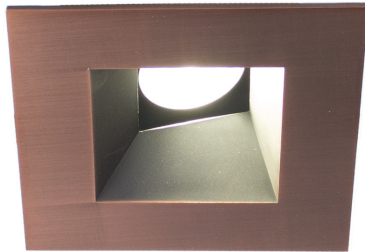

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Minimum profile, square 0° to 30° adjustable trim with interior open reflector.

FEATURES

- 3.5" aperture
- Damp location listed
- 30° visual cutoff angle for glare control
- Adjustable fixtures are ideal for sloped ceiling applications
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Durable die-cast aluminum construction with borosilicate glass lens. Extruded aluminum heat sink.

Power Consumption: 21.5W

Dimming: 0-10V Dimming: 100%-10%
ELV Dimming: 100%-15% (120V only)


Mounting: Two heavy gauge retention clips hold trim firmly to housing.

Finish: Powder coated white
Electroplated brushed nickel and copper bronze

Standards: ETL & cETL Listed. Fixtures with * are Title 24 JA8-2016 Compliant.

TRIMS

Model#	Beam	Color Temp	CRI	Lumens	CBCP	Finish
HR3LEDT518P <i>0° to 30° Adjustable</i>	N 30°	827 2700K	85	1135	2469	BN Brushed Nickel CB Copper Bronze WT White
		927* 2700K	90	950	2092	
		830 3000K	85	1165	2540	
		930* 3000K	90	1065	2381	
		835 3500K	85	1270	2791	
	840 4000K	85	1295	2792		
	F 52°	827 2700K	85	1100	1358	
		927* 2700K	90	990	1258	
		830 3000K	85	1140	1435	
		930* 3000K	90	1030	1303	
835 3500K		85	1230	1550		
840 4000K	85	1265	1580			



HR3LEDT518P

Example: HR3LEDT518PF835BN

COMPATIBLE HOUSINGS *See individual housing spec sheets for complete information.*

New Construction

HR-3LED-H18D1-ICA <i>Narrow, IC-Rated, Airtight</i>	120V-277V	HR-3LED-H18D1-ICAC <i>Narrow, IC-Rated, Airtight Chicago Plenum</i>	120V-277V
HR-3LED-H18D-ICA <i>IC-Rated, Airtight</i>	120V-277V	HR-3LED-H18D-ICAC <i>IC-Rated, Airtight Chicago Plenum</i>	120V-277V
HR-3LED-H18D-EMICA <i>IC-Rated, Airtight Emergency Backup Battery</i>	120V	HR3LED-H18D-EMICAF <i>IC-Rated, Airtight Emergency Backup Battery</i>	277V
HR-3LED-H18D-A <i>New Construction Non-IC, Airtight</i>	120V-277V	HR-3LED-R22D <i>Adjustable Remodel Non-IC Rated, Airtight</i>	120V-277V

REPLACEMENT MODULES

Reflectors

<i>Narrow Flood Flood</i>	SL-REF-BL10-1-N SL-REF-BL10-1-F
---------------------------	--

LED

2700K (90 CRI)	BXRC-27G1000-B-23
2700K	BXRC-27E1000-B-23
3000K (90 CRI)	BXRC-30G1000-B-23
3000K	BXRC-30E1000-B-23
3500K	BXRC-35E1000-B-23
4000K	BXRC-40E1000-B-23

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760