


## Model: LED-SL-101

### LEDme® Display Spot Light

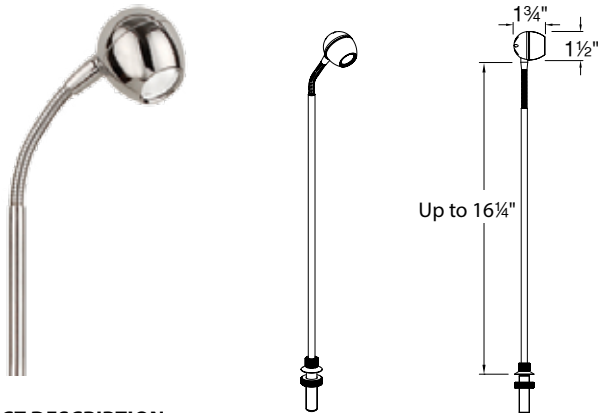

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

#### PRODUCT DESCRIPTION

Designed with a flexible neck, vents for thermal management and a threaded adjustable mounting rod, the die-cast aluminum LEDme® Display Spot Light offers three color temperatures and long life LEDs for a flexible, easy to install energy efficient display luminaire.

#### FEATURES

- Quick and easy installation
- Available in 2 color temperatures
- Choose from 2 beam spreads
- Flexible neck for easy adjustment
- Threaded rod allows for mounting in varying applications
- Rod is adjustable from 4-16 1/4" and may be field cut
- Vents for thermal management extend LED life
- interchangeable reflectors for changing beam spreads
- Replaceable LED modules
- Free of projected heat, UV and IR radiation
- Includes 72" wire
- 100,000 hour rated life
- 5 year WAC Lighting product warranty

#### SPECIFICATIONS

**Construction:** Die-cast aluminum head, steel rod, copper base and acrylic lens.

**Driver:** Plug-in LEDme® magnetic low voltage driver required (order separately).

**Light Source:** Includes one 3W 3000K or 4500K LED.

Total power consumption of 3W.

**Finish:** Black (BK) powder coat paint and electroplated Brushed Nickel (BN) and Chrome (CH).

**Standards:** UL and CUL Listed.


#### FIXTURE PERFORMANCE

Model #	Beam	Color Temp	Lumens	Efficacy	CBCP
<b>LED-SL-101-WW-F</b>	25°	3000K	100	33.3 Lm/W	1617
<b>LED-SL-101-WW-W</b>	40°	3000K	100	33.3 Lm/W	696
<b>LED-SL-101-NW-F</b>	25°	4500K	110	36.6 Lm/W	1872
<b>LED-SL-101-NW-W</b>	40°	4500K	110	36.6 Lm/W	807

#### ORDER NUMBER

Model #	Color Temp	Beam	Finish
<b>LED-SL-101</b>	<b>WW</b> 3000K	<b>F</b> 25°	<b>BK</b> Black
	<b>NW</b> 4500K	<b>W</b> 40°	<b>BN</b> Brushed Nickel
			<b>CH</b> Chrome

#### FINISHES



#### REPLACEMENT MODULE

Model #	Watt	Color Temp
<b>RM1X3-30-SL</b>	1 x 3W	3000K
<b>RM1X3-45-SL</b>	1 x 3W	4500K
<b>RM1X3-60-SL</b>	1 x 3W	6000K

#### REFLECTORS

Model #	Beam
<b>SL-LENS-S</b>	8°
<b>SL-LENS-F</b>	25°
<b>SL-LENS-W</b>	40°



Example: **LED-SL-101-NW-W-BK**

#### LEDme® PLUG-IN DRIVER

Model #	Wattage	Dimensions
<b>LED-700MA12-P</b>	12W	L: 5" W: 3" H: 1 1/8"

See next page for complete driver spec sheet.

#### WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

#### Headquarters/Eastern Distribution Center

615 South Street • Garden City, NY 11530

Phone (516) 515.5000 • Fax (516) 515.5050

#### Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585

## Model: LED-SL-101

### LEDme® Display Spot Light Driver

#### FEATURES

- Magnetic low voltage driver
- 6ft power cord
- Power up to 4 LED-SL101 fixtures
- Plug and play terminal blocks
- Constant current for optimized performance
- Surge protection
- Short circuit protection
- UL 60950 Listed
- 5 year WAC Lighting product warranty



#### ORDER NUMBER and SPECIFICATIONS

##### LED-700MA12-P

Input Voltage	120VAC, 50/60Hz
Input Current	0.2A max
Output Voltage	12VDC
Output Current	700mA
Wattage	12W max
Powers up to	4 Display Lights