


# ASYMMETRICAL RECESSED CHANNEL WAC LIGHTING

LED-T-RCH2

Responsible Lighting®



Indoor InvisiLED® tape

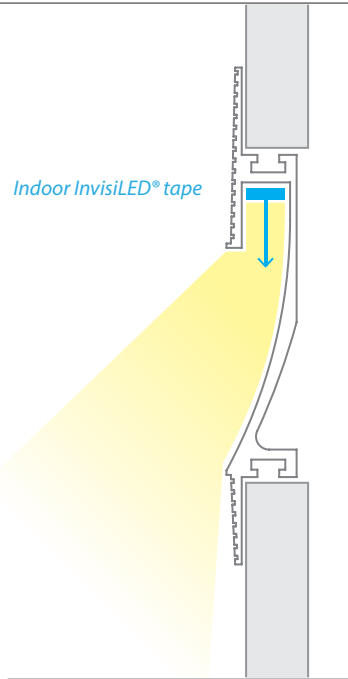

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_


### COMPATIBLE PRODUCTS

InvisiLED® Pro, Pro2, Pro3

InvisiLED® LITE, Classic

InvisiLED® Daylight to Sunset, Palette

- Installs within drywall depth
- Linear channel can be field cut
- Accommodates one run of InvisiLED® indoor tape. See individual InvisiLED spec sheets.
- Dense foam insert for spackling
- Recommended installation within 15 inches of surface to be illuminated
- Aluminum extrusion powder coated in matte white
- Remote transformer is required

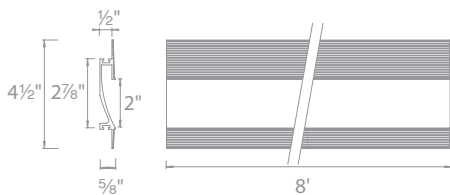

8 ft linear channel

Includes an end cap  
Can be field cut


LED-T-RCH2-WT



Power feed

Includes a wiring box, two hanger bars, a five-pin InvisiLED® adapter, and two end caps  
The end cap may be placed on either side or be removed  
Hanger bars may install on any side of the wiring box

LED-T-RBOX2-WT

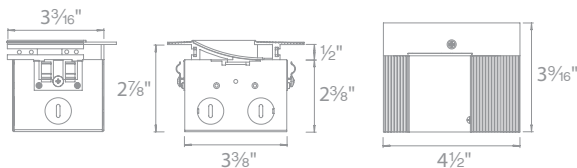

LED-T-\_\_\_\_\_-WT

Example: LED-T-RCH2-WT

WAC Lighting  
www.waclighting.com  
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive • Port Washington, NY 11050  
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center  
1750 Archibald Avenue • Ontario, CA 91760  
Phone (800) 526.2588 • Fax (800) 526.2585

# ASYMMETRICAL RECESSED CHANNEL WAC LIGHTING

LED-T

Responsible Lighting®

## PERFORMANCE CHART

	InvisiLED® Pro3	InvisiLED® Pro2	InvisiLED® Pro	InvisiLED® LITE
2200K	105			
2700K	185	155	95	75
3000K	190	145	95	85
3500K	215	160	100	
4500K	230	160	105	

One strip of tape was used under the diffuser, data shows lumen output per foot

**WAC Lighting**  
www.waclighting.com  
Phone (800) 526.2588 • Fax (800) 526.2585

**Headquarters/Eastern Distribution Center**  
44 Harbor Park Drive • Port Washington, NY 11050  
Phone (516) 515.5000 • Fax (516) 515.5050

**Western Distribution Center**  
1750 Archibald Avenue • Ontario, CA 91760  
Phone (800) 526.2588 • Fax (800) 526.2585