
## InvisiLED® Pro 3

## 24V High Output Foldable LED Tape Light

# **WAC LIGHTING**

## Responsible Lighting®

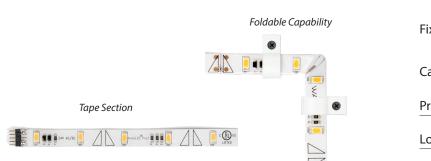

Fixture Type:	
Catalog Number:	
Project:	
Location:	

#### PRODUCT DESCRIPTION

Professional grade white tape light that delivers optimal color consistency and brightness. An ideal system for task or accent lighting applications.

#### **FEATURES**

- Both sides of field cut material can be used with male to male adapter
- Foldable design for lateral pattern creation
- Install LED-T-CL1 clips with folds
- Ultra thin profile at 1/8". 90° fold height of 3/8"
- · Diodes spaced evenly at 1" on center
- · Minimum run length of 1'
- · May be field cut every 6" at the end of a run
- · Three mounting methods provided for different surfaces
- 70,000 hour rated life
- 5 year WAC Lighting product warranty

#### **SPECIFICATIONS**

**Construction:** Flexible, silicone cased tape light. Peel and stick 3M construction adhesive on back. Indicating marks for field cutting.

**Power Supply:** Remote and plug-in electronic Class 2 transformers. 120VAC/120-277VAC, 50/60Hz input, 24V 60W and 96W output.

Light Source: 12 LEDs per foot. Runs on 24V at 5W per foot.


Dimming: May be dimmed with electronic low voltage 0-10V(ELV) dimmer.

**Operating Temperature:**  $-4^{\circ}F - 104^{\circ}F$  ( $-20^{\circ}C - 40^{\circ}C$ ), relative humidity 95%.

Standards: UL & CUL Listed for damp locations.

#### **ORDER NUMBER – TAPE SECTIONS**

Watts/ft	Cold	or Temp	CRI	Lumens/ft	Lengtl	า	Qty	Tape	Color
5					6IN	6 inches	1		
	30	3000K	95	395	1		1	<b>WT</b> White	White
	35	3500K	90	440	5	5 feet	1		********
	45	4500K	90	475	1-40	1 foot	40		
		27 30 35	27 2700K 30 3000K 35 3500K	<b>27</b> 2700K 95 <b>30</b> 3000K 95 <b>35</b> 3500K 90	<b>27</b> 2700K 95 385 <b>30</b> 3000K 95 395 <b>35</b> 3500K 90 440	27 2700K 95 385 6IN 30 3000K 95 395 1 35 3500K 90 440 5	5 <b>30</b> 3000K 95 395 <b>1</b> 1 foot <b>5</b> 5 feet	27 2700K 95 385 6IN 6 inches 1 30 3000K 95 395 1 1 foot 1 35 3500K 90 440 5 5 feet 1	27 2700K 95 385 6IN 6 inches 1 30 3000K 95 395 1 1 foot 1 35 3500K 90 440 5 5 feet 1





# LED-TE24\_\_\_-\_-WT Example: LED-TE2445-6IN-WT

#### **Class 2 Power Supply (Required)**

Туре		Model	Input	Output	Max Run	Dim	
Remote	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	EN-2460-RB2-T EN-24100-RB2-T	120VAC 120VAC	24VAC/60W 24VAC/96W	12 feet 20 feet	ELV ELV	Includes a 6 foot lead wire
Plug-in		EN-2460-P-AR-T EN-24100-P-AR-T	120VAC 120VAC	24VAC/60W 24VAC/96W	12 feet 20 feet	ELV ELV	Includes a 6 foot lead wire
Remote 277V		EN-24100-277-RB2-T	120-277VAC	24VDC/96W	20 feet	0-10V	Includes a 6 foot lead wire

waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 **Central Distribution Center** 1600 Distribution Ct Lithia Springs, GA 30122 **Western Distribution Center** 1750 Archibald Avenue Ontario, CA 91760

## **InvisiLED® Pro 3**

# WAC LIGHTING

## 24V High Output Foldable LED Tape Light

Responsible Lighting®

**Indoor Controller** 

Touch Panel and Motion Sensor



Includes a Touch Panel, an Occupancy Sensor, and a Controller CT-6A-R2 AC/DC input at 12V(60W Max) or 24V(96W Max) Connect on secondary side of driver/transformer

Pro, Pro2, Pro3, LITE, Classic Palette

#### **Indoor Electrical Accessories**

	In Wall Rated Extension Cable	LED-TC-WEXT-144 LED-TC-WEXT-144-WT	Black White	12 ft 12 ft
Him H	Extends distance between a hard wired power supply or a wiring box to a tape section.	LED-TC-WEXT-240 LED-TC-WEXT-240-WT	Black White	20 ft 20 ft
	In Wall Rated Joiner Cable	LED-TC-WIC-144	Black	12 ft
	Connects tape sections. 2 female ends.	LED-TC-WIC-144-WT LED-TC-WIC-240	White Black	12 ft 20 ft
**	1 male to male connector included	LED-TC-WIC-240-WT	White	20 ft
		LED-TC-P-2	Black	2 ft
	Lead Wire	LED-TC-P-2-WT	White	2 ft
il mili		LED-TC-P-12	Black	12 ft
	Alternative lengths for plug-in power supplies	LED-TC-P-12-WT	White	12 ft
	Extension Cable	LED-TC-EXT-144	Black	
Mark.	Extends distance between a hard wired power supply or a wiring box to a tape section	LED-TC-EXT-144-WT	White	12 ft
	Low Voltage Wiring Box With Feed	LED TO D 2	Black	L: 1½ in
•	Neatly houses connectos for up to two wires with 12" female feed	LED-TC-B-2 LED-TC-B-2-WT	White	W:¾ in H:⅓ in
	Low Voltage Wiring Box			L: 1½ in
	-	LED-T-B		W: ¾ in
	Neatly houses connections for up to two wires			H: 7/8 in
	Wiring Box With Switch			L: 6¼ in
131	Use when spanning a large gap in a system layout without leaving	TB-S		W:15/8 in
	exposed wiring. Optional switch included			H: 1¼ in

Compatible with Pro, Pro2, Pro3, LITE, Classic

· ·	Male to male connector	LED-TC-MM	Black	50 Qty
		LLD IC IC/2 WI	VVIIICE	72111
		LED-TC-IC72-WT	White	72 in
		LED-TC-IC72	Black	72 in
	Connects tape sections	LED-TC-IC36-WT	White	36 in
		LED-TC-IC36	Black	36 in
Will have		LED-TC-IC12-WT	White	12 in
	oiner Cable	LED-TC-IC12	Black	12 in
		LED-TC-IC6-WT	White	6in
		LED-TC-IC6	Black	6 in
		LED-TC-IC2-WT	White	2 in
		LED-TC-IC2	Black	2 in

Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette. Change directionality of tape runs and reuse cut ends of tape.

	M. Santa	3-Way "Y" Connector	LED-TC-Y LED-TC-Y-WT	Black White	
	-	Connects tape sections	LED-IC-Y-WI	wnite	
		4-Way "X" Connector	LED-TC-X	Black	
			LED-TC-X-WT	White	
	<u> </u>	Connects tape sections			
		"L" Connector	LED-TC-L	Black	
		Connects tape sections	LED-TC-L-WT	White	
		End cap	LED-TC-EC	Black	
		1 cut and 1 male end cap	LED-TC-EC-WT	White	


Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette

## InvisiLED® Pro 3

### Indoor Aluminum Channels

# WAC LIGHTING

Responsible Lighting®



Diffuses light from InvisiLED tape Includes a diffuser, two end caps, and five screws Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette



Eliminates visible hot spots Includes a diffuser, two end caps, and five screws Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette



Includes a diffuser, two end caps, and ten screws Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette



Includes 2 pieces, 4 screws. Use to mount Aluminum Channel, Deep Aluminum Channel, 45° Angled Aluminum Channel

## INDOOR MOUNTING ACCESSORIES



1/2"

**Aluminum Retrofit Channel** 

**LED-T-RC** 3 feet

Clear Channel

LED-TO24-CH5

5 feet

Can be bent to create fixed curves or used as a glare shield Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette Includes a diffuser, two end caps, and five screws Provides a clean mounting surface for 3M adhesive



Clip For surfaces that are difficult to adhere

LED-T-CL

10 pcs 10 Screws

Curve Clip Secures on one edge

LED-T-CL1

10 pcs 10 Screws

Clips to hold indoor InvisiLED tapes sections Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette