


GALILEO – model: LED610

LEDme® Track Luminaire

WAC LIGHTING

Responsible Lighting®

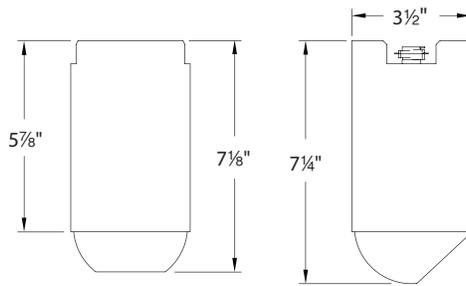

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Innovative engineering integrates form and function with state-of-the-art LED technology. Simplicity and attention to detail allow for a 360° aiming rotation without altering the profile, maintaining clean form without interruption to the visual line.

For use with WAC Lighting's 120V Track system and compatible with other manufacturer's track (consult factory for specific brands).

FEATURES

- Title 24 California Energy Commission Compliant (90 CRI versions)
- Smooth and continuous ELV dimming
- ANSI Compliant Warm/Neutral LED Bins for a finer color consistency
- Replaceable LED module
- 60,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Extruded aluminum cover with die-cast aluminum head and clear lens.

Driver: Input voltage: 120VAC/60Hz; High power factor >0.9
Max Load: 14.5W

Light Source: COB LED

Total power consumption of 14W with included driver.

Dimming: May be dimmed to 8% with electronic low voltage (ELV) dimmer.

Finish: Powder coat paint finish, electroplated.
Available in Black (BK), Brushed Nickel (BN), and White (WT).

Standards: UL & CUL Listed. Meets Energy Star Requirements.

FIXTURE PERFORMANCE

| Model # | Beam | Color Temp | Watts | Lumens | Efficacy | CBCP | CRI |
|--------------------|------|------------|-------|--------|----------|------|-----|
| LED610S-927 | 20° | 2700K | 14.5W | 675 | 47 Lm/W | 3422 | 90 |
| LED610F-927 | 32° | 2700K | 14.5W | 660 | 46 Lm/W | 1596 | 90 |
| LED610S-27 | 20° | 2700K | 14.5W | 845 | 58 Lm/W | 4206 | 80 |
| LED610F-27 | 32° | 2700K | 14.5W | 775 | 53 Lm/W | 1800 | 80 |
| LED610S-9W | 20° | 3000K | 14.5W | 700 | 48 Lm/W | 3426 | 90 |
| LED610F-9W | 32° | 3000K | 14.5W | 680 | 47 Lm/W | 1649 | 90 |
| LED610S-WW | 20° | 3000K | 14.5W | 915 | 63 Lm/W | 4532 | 80 |
| LED610F-WW | 32° | 3000K | 14.5W | 865 | 60 Lm/W | 1964 | 80 |
| LED610S-35 | 20° | 3500K | 14.5W | 930 | 64 Lm/W | 4679 | 80 |
| LED610F-35 | 32° | 3500K | 14.5W | 920 | 63 Lm/W | 2158 | 80 |
| LED610S-CW | 20° | 4000K | 14.5W | 910 | 63 Lm/W | 4577 | 80 |
| LED610F-CW | 32° | 4000K | 14.5W | 845 | 58 Lm/W | 1929 | 80 |

ORDER NUMBER

| System | Model # | Beam Spread | Color Temp | Finish | |
|------------------|---------------|-----------------|---------------------------|-----------------|--------------------------|
| H H Track | LED610 | S 20° | 927 2700K (90 CRI) | BK Black | |
| L L Track | | | 27 2700K | | |
| J J Track | | F 32° | 9W 3000K (90 CRI) | | BN Brushed Nickel |
| | | | WW 3000K | | |
| | | 35 3500K | WT White | | |
| | | CW 4000K | | | |

REPLACEMENT LED MODULE

| | |
|---------------------|----------------|
| BXRC-27G1000 | 2700K (90 CRI) |
| BXRC-27E1000 | 2700K |
| BXRC-30G1000 | 3000K (90 CRI) |
| BXRC-30E1000 | 3000K |
| BXRC-35E1000 | 3500K |
| BXRC-40E1000 | 4000K |



Example: H-LED610S-WW-BK

INTERCHANGEABLE BEAM REFLECTORS

| | |
|-------------|-----|
| RF-S | 20° |
| RF-F | 40° |

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585


GALILEO – model: LED610S

Photometrics


WAC LIGHTING

Responsible Lighting®

20° Beam Angle - 3000K (85 CRI)

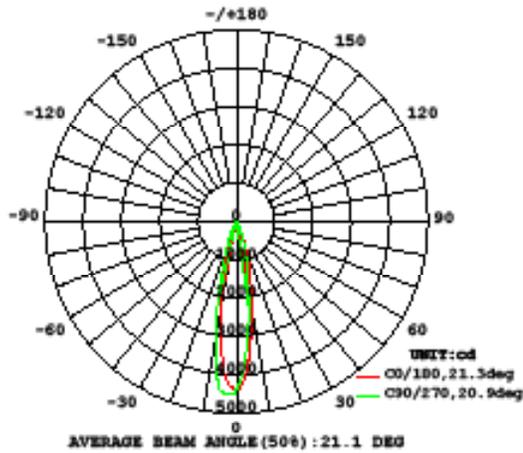

32° Beam Angle - 3000K (85 CRI)

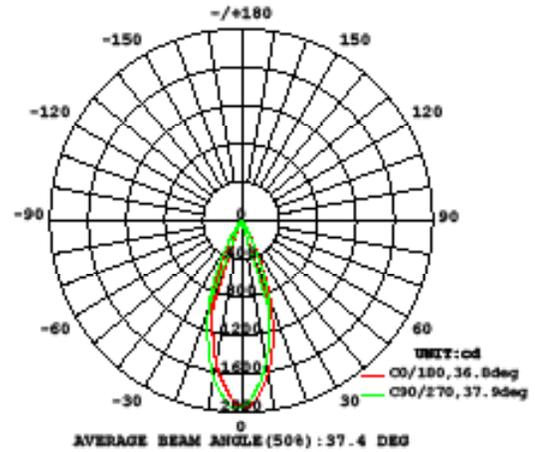

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585