

# WALL WASH – 3020W

## Monopoint Luminaire

# WAC LIGHTING

Responsible Lighting®




Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

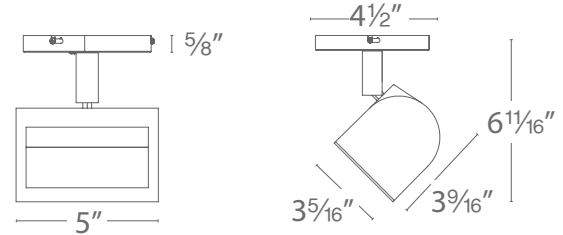

### PRODUCT DESCRIPTION

LED luminaire with optimum light distribution for wall wash application

### FEATURES

- 350° horizontal rotation and 90° vertical aiming
- Ceiling and wall mountable
- Integral LED and driver
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

### SPECIFICATIONS

- Construction:** Die-cast aluminum
- Input:** 120V 50/60 Hz
- Power Consumption:** 20W
- Light Source:** High output LED
- Dimming:** Electronic Low Voltage (ELV) 100% - 5% (120V only)
- Finish:** Powder coated
- Standards:** UL & cUL Damp Location Listed, Title 24 JA6-2016 Compliant.

### ORDER NUMBER

System	Model	Color Temp	CRI	Lumens	Finish
MO Monopoint	3020W	930 3000K	90	925	<b>BK</b> Black <b>WT</b> White

### MO-3020W-930-\_\_\_\_\_

Example: MO-3020W-930-BK

### EXTENSIONS Custom order as a complete unit. Ceiling mount only.

Extension	Model	Color Temp	Finish
<b>X6</b> 6" <b>X12</b> 12" <b>X18</b> 18" <b>X24</b> 24" <b>X36</b> 36" <b>X48</b> 48"	MO3020W	930	<b>BK</b> <b>WT</b>

Example: X12-MO3020W930WT

### WAC Lighting

www.waclighting.com  
Phone (800) 526.2588 • Fax (800) 526.2585


### Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050  
Phone (516) 515.5000 • Fax (516) 515.5050

### Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760  
Phone (800) 526.2588 • Fax (800) 526.2585

## LAYOUT GUIDE

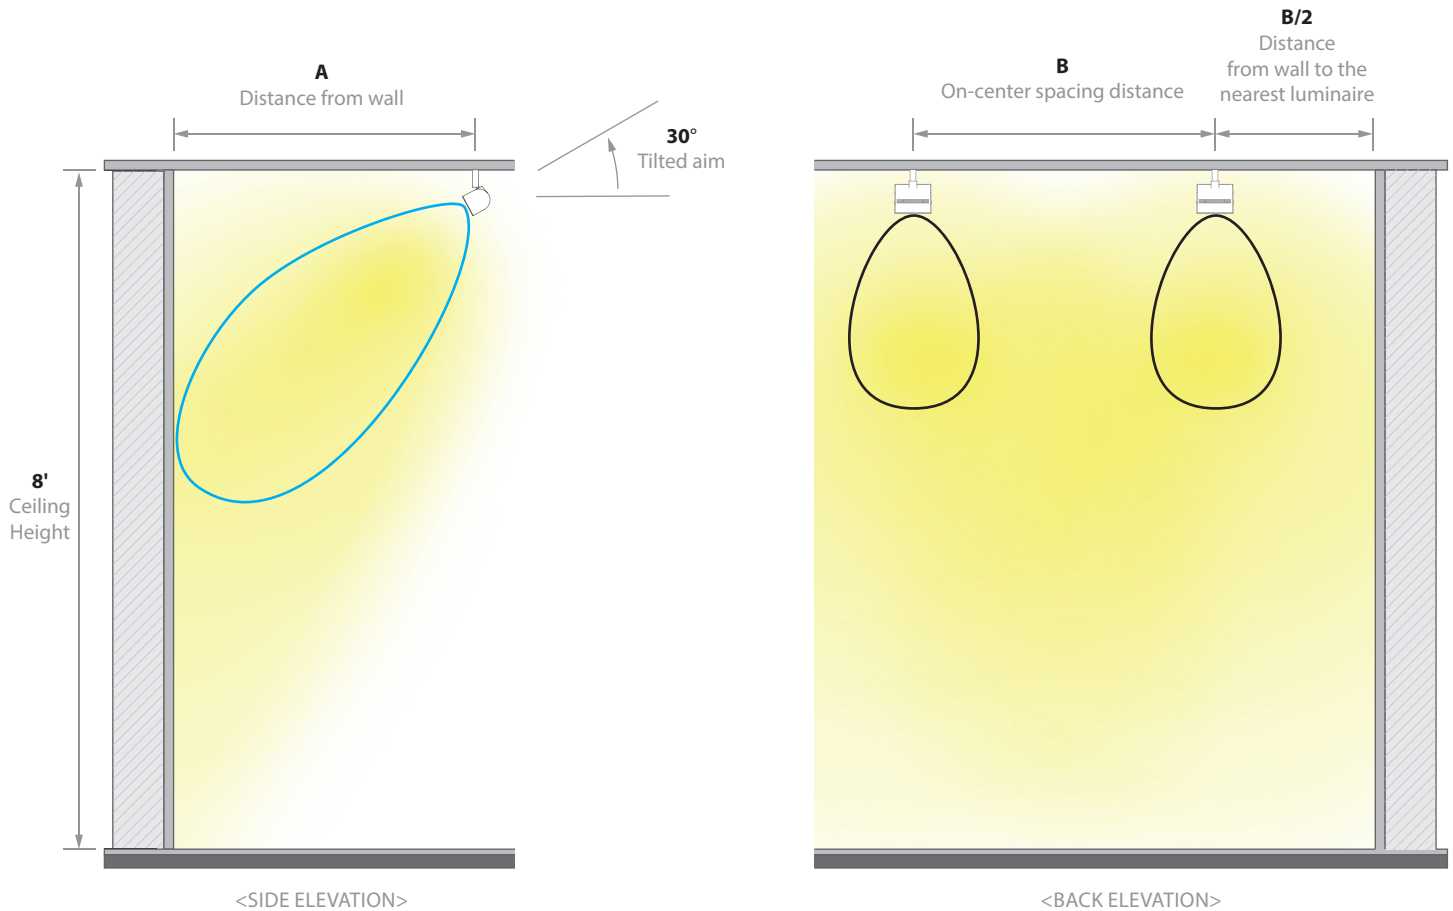


## AVERAGE WALL ILLUMINANCE

		<b>B</b> On-center spacing distance	
		3 feet	5 feet
<b>A</b> Distance from wall	3 feet	31 fc	25 fc
	5 feet	20 fc	16 fc

## PHOTOMETRY

Shown when fixture is aimed towards the ground (nadir)

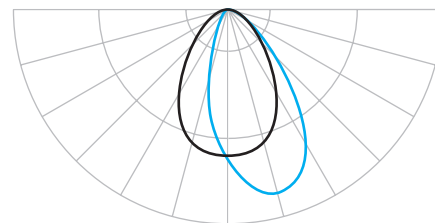

Results may vary depending on surface properties, ambient light levels, etc.