


# ARGOS – model: MO-LED25

## LEDme® Display Spot Light - Canopy Mount

# WAC LIGHTING

Responsible Lighting®

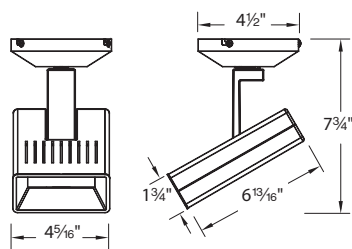

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

A celebration of the SSL revolution, designed exclusively around LED technology, breaking through the conventions of earlier light sources.

The rectangular form is derived from the optimal format for LED design on a PCB for thermal to surface area ratios.

Engineered with minimal components, perfect balance precision aiming, and a single diffuser that can be easily removed with a tool-free mechanism.

Developed for the most challenging applications in upscale residential and commercial environments.

### FEATURES

- Free of projected heat and UV and IR radiation
- Single tool-free lens assembly for easy in field change out of beam angle
- Available in two interchangeable optics
- Alternate beam angles may be ordered separately
- Replaceable LED modules
- 360° horizontal and 90° vertical "hot" aiming
- Ceiling and wall mountable
- 100,000 hour rated life
- 5 year WAC Lighting product warranty

### FIXTURE PERFORMANCE

| Model #          | Beam | Color Temp | Watts | Lumens | Efficacy | CBCP | CRI |
|------------------|------|------------|-------|--------|----------|------|-----|
| <b>LED25S-27</b> | 20°  | 2700K      | 25    | 1360   | 54 Lm/W  | 4923 | 85  |
| <b>LED25F-27</b> | 42°  |            |       | 1210   | 48 Lm/W  | 1831 |     |
| <b>LED25S-30</b> | 20°  | 3000K      | 25    | 1480   | 59 Lm/W  | 5868 | 85  |
| <b>LED25F-30</b> | 42°  |            |       | 1320   | 53 Lm/W  | 1948 |     |
| <b>LED25S-35</b> | 20°  | 3500K      | 25    | 1505   | 60 Lm/W  | 5087 | 85  |
| <b>LED25F-35</b> | 42°  |            |       | 1330   | 53 Lm/W  | 1860 |     |
| <b>LED25S-40</b> | 20°  | 4000K      | 25    | 1525   | 61 Lm/W  | 5472 | 80  |
| <b>LED25F-40</b> | 42°  |            |       | 1345   | 54 Lm/W  | 2017 |     |

### SPECIFICATIONS

**Construction:** Die-cast aluminum

**Driver:** Input voltage: 120VAC 50/60Hz, Max. Load: 25W

**Light Source:** 10 arrayed Cree XT-E LED

Total power consumption is 25W with driver

**Dimming:** Dimmable with electronic low voltage (ELV) dimmer

**Finish:** Black (BK) and White (WT) powder coat paint

**Standards:** ETL & cETL Damp Location Listed.

### ORDER NUMBER

| Model #         | Beam Spread  | Color Temp      | Finish          |
|-----------------|--------------|-----------------|-----------------|
| <b>MO-LED25</b> | <b>S</b> 20° | <b>27</b> 2700K | <b>BK</b> Black |
|                 |              | <b>30</b> 3000K |                 |
|                 | <b>F</b> 42° | <b>35</b> 3500K | <b>WT</b> White |
|                 |              | <b>40</b> 4000K |                 |

**MO-LED25**  -  -

Example: **MO-LED25S-30-BK**

### FINISHES

**BK**



**WT**



### REPLACEMENT MODULES

| Model             | Color Temp |
|-------------------|------------|
| <b>RM-10X3-27</b> | 2700K      |
| <b>RM-10X3-30</b> | 3000K      |
| <b>RM-10X3-35</b> | 3500K      |
| <b>RM-10X3-40</b> | 4000K      |

### INTERCHANGABLE OPTICS

| Model               | Beam |
|---------------------|------|
| <b>OPH-10X3-20D</b> | 20°  |
| <b>OPH-10X3-42D</b> | 42°  |

### WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

### Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

### Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585