### **AETHER 2"-** Round Adjustable Trimless

R2ARAL

## WAC LIGHTING

Responsible Lighting®



PRODUCT D	<b>ESCRIP</b>	TION
-----------	---------------	------

Shallow housing that is designed to fit in tight plenum spaces without sacrificing lumen output.

#### **FEATURES**

- · Designed to fit in tight plenum
- · Wet location listed for trims
- 2" trim aperture, 2" housing height
- Universal input voltage (120V-277V)
- 5 year WAC Lighting product warranty
- 0-25° vertical and 365° horizontal adjustment

Fixture Type:	
Catalog Number:	
Project:	
Location:	

#### **SPECIFICATIONS**

**Construction:** Die-cast aluminum trim with die-cast aluminum heat sink

**Dimming:** 100% - 5% with 0-10V

100% - 5% with Electronic Low Voltage (ELV)/TRIAC

Input: 120V-277V AC

Power: 15W, power factor 0.98

Mounting: Retention clips firmly hold trim to housing.

Finish: Powder coated white, black, enamel coated haze, electroplated brushed

ickel

**Standards:** UL & cUL Listed, wet location listed trims, Title 24 JA8-2016

Compliant

Ceiling thickness: 1/2" - 1"


TRIM (SEE NEXT PAGE FOR HOUSING)		Beam	Color Temp		CRI	Lumen	CBCP	Finish	Interior/Trim
			827 830	2700K 3000K	85 85		3560 3745	HZ	Haze
		N 22º	835	2700K	85	1390	3820	WT	White
		N 22°	840	4000K	85	1405	3858	BK	Black
	$\vdash 2\frac{5}{8}" \dashv$		927	2700K	90	1080	2968	BN	Brushed Nickel
			930	3000K	90	1120	3078		
<b>R2ARAL</b> Round	5½"	_							
nouna			827	2700K	85	1270	1943		
000000000000000000000000000000000000000			830	3000K	85	1335	2044	HZ	Haze
		7,, -7,,	835	2700K	85	1360	2085	WT	White
		5 <mark>8" <b>F</b> 40°</mark>	840	4000K	85	1375	2105	BK	Black
			927	2700K	90	1055	1620	BN	Brushed Nickel
			930	3000K	90	1095	1680		

### **AETHER** - Housing

HR-2LED-H13A

# WAC LIGHTING

### Responsible Lighting®

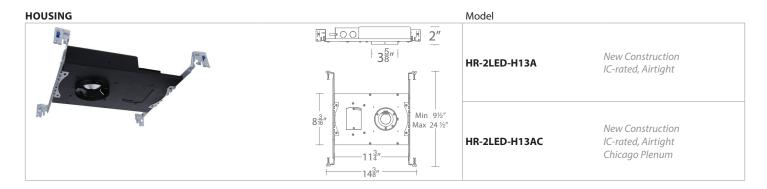

HR-2LED-H13\_\_\_\_

Example: HR-2LED-H13A