

# 3.5" OCULUX DIM-TO-WARM

0 -35° Adjustable - R3BRA, R3BSA

# WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project:

Location:

## PRODUCT DESCRIPTION

The brilliant LED recessed downlight that gradually changes to a warmer color temperature as you dim. Great for new construction projects or remodels.

## FEATURES

- Dim-to-Warm color temperature range: 3000K - 1800K
- Energy Star® Rated
- Title 24 Compliant
- IC-rated Remodel and New Construction
- Airtight in New Construction and remodel
- Shallow housing under 4" depth
- Cutout 4¼"

## SPECIFICATIONS

**Construction:** Die-cast aluminum trim and heat sink

**Dimming:** ELV or TRIAC or 0-10V dimming compatible

**Input:** 120V for R3BNICA-10, R3BBRT-10; 120-277V for R3BNICA-10U

**Light Source:** 11W 95 CRI Single LED Module. Rated Life: 50,000 hours

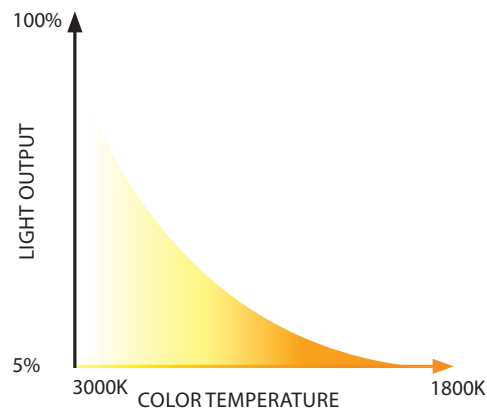
**Mounting:** Retention clips firmly hold trim to housing.

**Finish:** Powder coated

**Ceiling thickness:** ½" - 1"

**Standards:** ETL&cETL listed, Damp location listed

**Operating Temperature:** -4°F to 104°F (20°C to 40°C)



Trims (Order Housing Separately)	Model	Beam	Max Lumens	Max CBCP	Color Temp	Finish
	<b>R3BRA</b> Round 0 - 35° Adjustable	<b>S</b> 19° <b>N</b> 27° <b>F</b> 50°	985	4712	<b>WD</b> 3000K - 1800K	<b>HZWT</b> Haze/White <b>BN</b> Brushed Nickel <b>WT</b> White
	<b>R3BSA</b> Square 0 - 35° Adjustable	<b>S</b> 19° <b>N</b> 27° <b>F</b> 50°	985	4712	<b>WD</b> 3000K - 1800K	<b>HZWT</b> Haze/White <b>BN</b> Brushed Nickel <b>WT</b> White

## R3BRA-\_\_WD-WT

Example: R3BRA-SWD-WT

waclighting.com  
 Phone (800) 526.2588  
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
 44 Harbor Park Drive  
 Port Washington, NY 11050

Central Distribution Center  
 1600 Distribution Ct  
 Lithia Springs, GA 30122

Western Distribution Center  
 1750 Archibald Avenue  
 Ontario, CA 91760


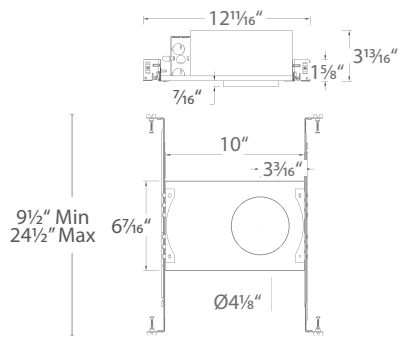

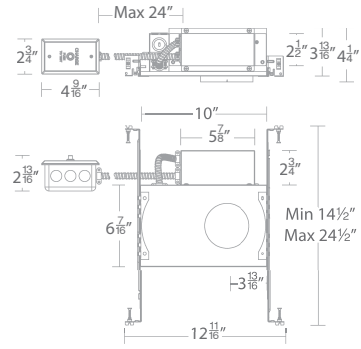


# 3.5" OCULUX DIM-TO-WARM

## New Construction and Remodel Housings

# WAC LIGHTING

Responsible Lighting®

Housings (Required) - Order separately from trims

	Model	Input	Dimming	Notes
<p><i>New Construction</i></p>  	<b>R3BNICA-10</b> IC-Rated, Airtight	120V	100% - 5% TRIAC, ELV, 0-10V	Less than 4" plenum depth  Allows adjustment in any direction when used with adjustable trims
	<b>R3BNICA-10U</b> IC-Rated, Airtight	120V - 277V	<b>120V</b> 100% - 5% TRIAC, ELV, 0-10V <b>277V</b> 100% - 1% 0-10V	Ceiling thickness: 1/2" - 1"
<p><i>New Construction (EM)</i></p>  	<b>R3BNICA-10U-EM</b> IC-Rated, Airtight	120V - 277V	<b>120V</b> 100% - 5% TRIAC, ELV, 0-10V <b>277V</b> 100% - 1% 0-10V	Less than 4" plenum depth  Allows adjustment in any direction when used with adjustable trims  Ceiling thickness: 1/2" - 1"  Integral Emergency battery pack with 24" lead wire remote test switch. Provides at least 90 minutes of 435lm illumination during emergency operation. Emergency battery and driver are field replaceable.
<p><i>Remodel</i></p>  	<b>R3BBRT-10</b> IC Rated	120V	100% - 5% TRIAC, ELV, 0-10V	Allows adjustment in any direction when used with adjustable trims  Ceiling thickness: 1/2" - 1"

**R3B** \_\_\_\_\_ **-10** \_\_\_\_\_  
Example: **R3BNICA-10**

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760