

3.5" OCULUX DIM-TO-WARM

Open Reflector - R3BRD, R3BSD

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The brilliant LED recessed downlight that gradually changes to a warmer color temperature as you dim. Great for new construction projects or remodels.

FEATURES

- Dim-to-Warm color temperature range: 3000K - 1800K
- Energy Star® Rated
- Title 24 Compliant
- IC-rated Remodel and New Construction
- Airtight in New Construction and remodel
- Shallow housing under 4" depth
- Cutout 4 1/4"

SPECIFICATIONS

Construction: Die-cast aluminum trim and heat sink

Dimming: ELV or TRIAC or 0-10V dimming compatible

Input: 120V for R3BNICA-10, R3BBRT-10; 120-277V for R3BNICA-10U

Light Source: 11W 95 CRI Single LED Module. Rated Life: 50,000 hours

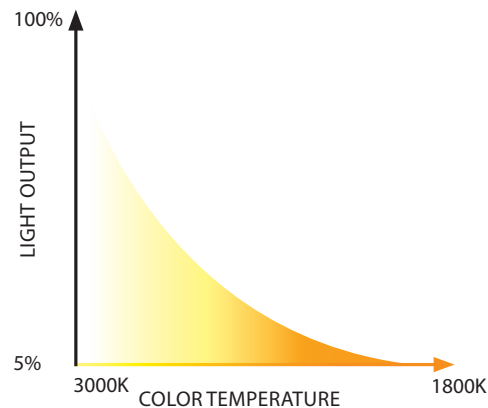
Mounting: Retention clips firmly hold trim to housing.

Finish: Powder coated

Ceiling thickness: 1/2" - 1"

Standards: ETL&cETL listed, Wet location listed

Operating Temperature: -4°F to 104°F (20°C to 40°C)



Trims (Order Housing Separately)	Model	Beam	Max Lumens	Max CBCP	Color Temp	Finish
	R3BRD Round Open Reflector Wet Location Listed	S 19° N 27° F 50°	765	3070	WD 3000K - 1800K	HZWT Haze/White BN Brushed Nickel WT White
	R3BSD Square Open Reflector Wet Location Listed	S 19° N 27° F 50°	735	2850	WD 3000K - 1800K	HZWT Haze/White BN Brushed Nickel WT White

R3BRD-__WD-WT

Example: R3BRD-SWD-WT

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760


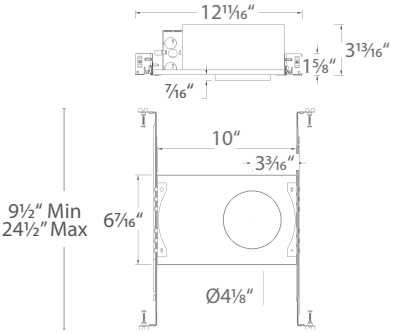

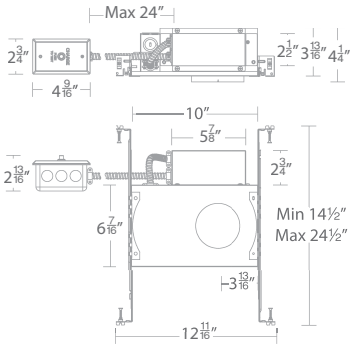


3.5" OCULUX DIM-TO-WARM

New Construction and Remodel Housings

WAC LIGHTING

Responsible Lighting®

Housings (Required) - Order separately from trims

		Model	Input	Dimming	Notes
<p>New Construction</p>  <p>9½" Min 24½" Max</p> 		R3BNICA-10 IC-Rated, Airtight	120V	100% - 5% TRIAC, ELV, 0-10V	Less than 4" plenum depth Allows adjustment in any direction when used with adjustable trims
		R3BNICA-10U IC-Rated, Airtight	120V - 277V	120V 100% - 5% TRIAC, ELV, 0-10V 277V 100% - 1% 0-10V	Ceiling thickness: ½" - 1"
<p>New Construction (EM)</p>  <p>Max 24"</p> 		R3BNICA-10U-EM IC-Rated, Airtight	120V - 277V	120V 100% - 5% TRIAC, ELV, 0-10V 277V 100% - 1% 0-10V	Less than 4" plenum depth Allows adjustment in any direction when used with adjustable trims Ceiling thickness: ½" - 1"
		<p>Integral Emergency battery pack with 24" lead wire remote test switch. Provides at last 90 minutes of 435lm illumination during emergency operation. Emergency battery and driver are field replaceable.</p>			
<p>Remodel</p>  		R3BBRT-10 IC Rated	120V	100% - 5% TRIAC, ELV, 0-10V	Allows adjustment in any direction when used with adjustable trims Ceiling thickness: ½" - 1"

R3B _____ **-10** _____
Example: **R3BNICA-10**

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760