


<b>CATALOG NUMBER</b>	<b>TYPE</b>
<b>PROJECT</b>	

**PRECISION MODULE – 9" (1 X 1) NEW CONSTRUCTION HOUSING** **SERIES MT9**

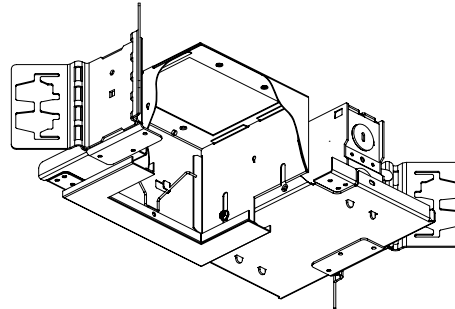

**Ordering Matrix - Housing**

Housing	Size	Type	Trim	
<input type="text"/>	<input type="text"/> X <input type="text"/>	<input type="text"/>	<input type="text"/>	
<b>MT9 = 9" Housing</b>	<b>1X1 = 1W X 1L (one cell)</b>	<b>N = New Construction</b>	<b>T = Trim O = Trimless</b>	Modules See Pg 2

Housing Ordering Example (*housing – size – type – trim + module*): MT9–1X1–N–T + module ordering code

**Product Details**

**Description:** Specification grade single module fixture that allows you to vary aiming position so that the aiming module is either below the ceiling plane or stays within the housing. This versatile luminaire is the perfect solution for better retail and commercial applications where high performance and maximum adjustability are important.

**Housing:** Housing is die formed 20 gauge steel with black abrasion resistant powder coat paint finish. Four black hex head philips screws attach the housing to frame. The four slots adjust to variable ceiling thickness.

**Frame:** Frame is 16 gauge steel with two built in universal hanger bar brackets, one located on each end.  
 Large J-Box attached to frame has seven ½" knockouts.  
 Luminaire system thermal protector located on junction box

**Trim:** Decorative white finish trim with two torsion springs or trimless option available.

**Housing Dimensions:** 1 X 1 = 9 1/8" L x 9 1/8" W x 8 3/8" H.  
 Total height with module(s) is 12 5/8".

**Listings:** UL & CUL Listed. Non-IC Rated. Listed for Branch Wiring.  
 Thermal Protector located on junction box meets NEC, UL and CSA requirements.


**Specification Features**

- Trimless option allows the fixture to blend into the ceiling.
- The 9" housing has a selection of seven different modules that fit within the same housing.
- Universal hanger bar brackets allow the luminaire to be used with all new construction ceiling types.
- 2 year W2 Architectural Lighting product warranty.
- Contact factory for dual-circuited and special configuration options.

**The full catalog number for the precision module consists of ordering information for both the housing and module selection.**

<b>CATALOG NUMBER</b>	<b>TYPE</b>
<b>PROJECT</b>	

**PRECISION MODULE - 9" (1 X 1) NEW CONSTRUCTION HOUSING** **SERIES MT9**





**Module Ordering Matrix (same module in every cell)**

	<b>Module Configuration</b>	<b>Cell 1</b>	<b>Voltage</b>
	□	□	□
Housing See Pg 1	<b>S</b> = Single Type	<b>T35N</b> <b>T35W</b> <b>T70N</b> <b>T70W</b>	<b>CR30</b> <b>CR38</b> <b>PR38</b>
			<b>G</b> = 120V <b>F</b> = 277V

Module Ordering Example (*configuration + module + voltage*): ST70NG

**Module Selection**

<b>Module</b>	<b>Model Number</b>	<b>Description</b>	<b>Ordering Code</b>
	MT-CDMT6-35N MT-CDMT6-35W MT-CDMT6-70N MT-CDMT6-70W MT-CDMPAR30-70 MT-CDMPAR38-100	39W T6 Metal Halide Narrow Beam (10°) 39W T6 Metal Halide Wide Beam (40°) 70W T6 Metal Halide Narrow Beam (10°) 70W T6 Metal Halide Wide Beam (40°) 70W PAR30 Metal Halide 100W PAR38 Metal Halide	<b>T35N</b> <b>T35W</b> <b>T70N</b> <b>T70W</b> <b>CR30</b> <b>CR38</b>
	MT-PAR38	100W (MAX) PAR38 Medium Skirt Incandescent*  * = 120V only.	<b>PR38</b>