


CATALOG NUMBER	TYPE
PROJECT	

4" PREMIUM LINE VOLTAGE DOWNLIGHT HOUSING

R4VI-B-ICA

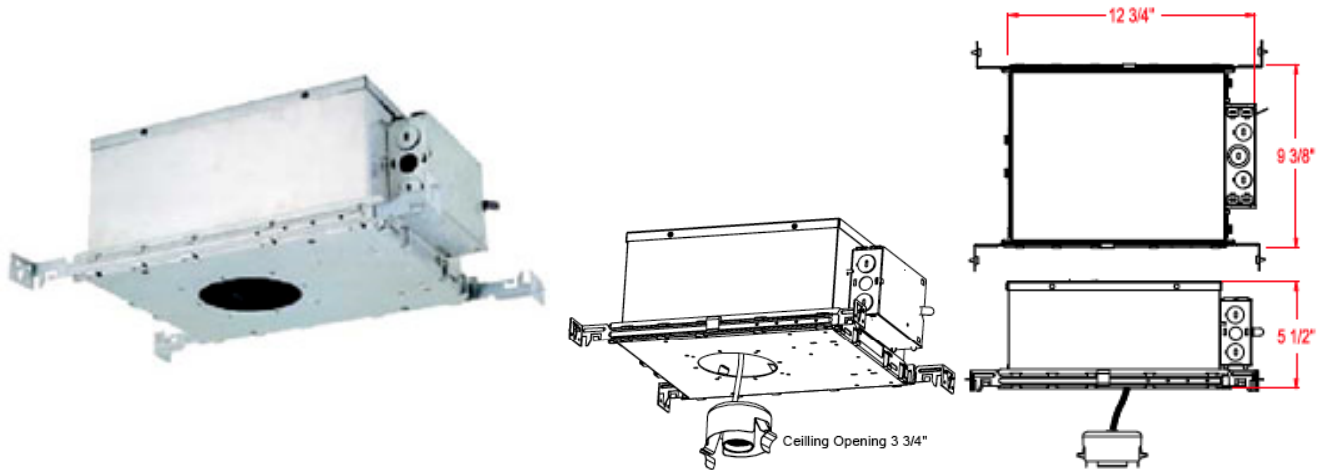

Ordering Matrix	
Series	Housing Type
[]	[]
R4VI-B – boxed	ICA – Insulation Contact & Air Tight







Example (series – housing type): R4VI-B-ICA

Product Details	
Application:	New construction housing suitable for insulation contact. Companies with requirements for Washington State Energy Code (WESC) for air tight housings (when installed as instructed with option gasket kit "RGK"). Maximum 1* inch ceiling thickness.
J Box:	Junction box is accessible from above or below the ceiling. Supplied with eight standard knockouts and four Integral non-metallic sheathed cable clamps. Spring loaded door, for easy access to wiring. Approved for through branch wiring.
Mounting:	Supplied with hanger bars adjustable to 25" Bars have score lines and can be cut to accommodate 12" joist spans. Bar have notches for easy installation on T-bars. Hanger bars mount on all four sides.
Material:	20 gauge galvanized steel. Ceramic/nickel-plated socket.
Ratings:	UL & CUL listed.

Specification Features
<ul style="list-style-type: none"> Suitable for damp locations. 5 year WAC Lighting product warranty.

CATALOG NUMBER	TYPE
PROJECT	

4" PREMIUM LINE VOLTAGE DOWNLIGHT HOUSING **R4VI-B-ICA**

Compatible Trims (Sold Separately):							
R4VT-21 Open Reflector Trim			R4VT-22 Step Baffle Trim				
Finish	Interior		Trim	Finish		Interior	Trim
SBK	Specular Black		White	BK		Black	White
WT	White		White	WT		White	White
R4VT-23 Pinhole Trim			R4VT-24 Eyeball with Step Baffle				
Finish	Interior		Trim	Finish		Interior	Trim
WT	NA	White	WT	Black	White		
R4VT-25 Aperture Cone			R4VT-26 Step Baffle				
Finish	Interior		Trim	Finish		Interior	Trim
SBK	Specular Black		White	BK		Black	White
SC	Specular Clear	White	WT	White	White		