


CATALOG NUMBER	TYPE
PROJECT	

6" PREMIUM LINE VOLTAGE DOWNLIGHT TRIM **R6VT-60-S**

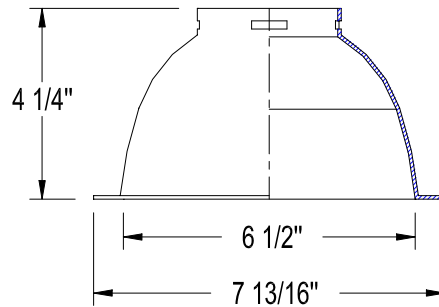

Ordering Matrix		
Series	Model Number	Finish
R6VT	60-S	SC

Ordering Example (series – model number – finish): R6VT-60-S-SC


Product Details	Specification Features
<p>Application: Shallow ceiling down light trim, 1-inch maximum ceiling thickness. Provides broad area illumination. Used with incandescent or fluorescent lamp housings.</p> <p>Materials: One-piece aluminum construction. Integral trim ring is painted white, interior reflector is anodized aluminum. Trim is retained to socket via spring clips.</p> <p>Finish: SC = Specular Clear baffle with White trim</p> <p>Ratings: UL & CUL listed.</p>	<ul style="list-style-type: none"> • Suitable for damp locations • 5 year WAC Lighting product warranty.

Compatible Housings (sold separately)					
<p>R6VI-B-ICA Insulation Contact & Air Tight New Construction Incandescent Lamp: A19 60W PAR30 75W</p>		<p>R6VI-S-ICA Insulation Contact & Air Tight Shallow New Construction Incandescent Lamp: A19 60W PAR30 75W</p>		<p>R6VI-S-R-ICA Insulation Contact & Air Tight Shallow Remodeling Incandescent Lamp: A19 60W PAR30 75W</p>	
<p>R6VI Non IC Frame-in Style New Construction Incandescent Lamp: A19 60W PAR30 75W</p>		<p>R6VI-R-ICA Insulation Contact & Air Tight Remodeling Incandescent Lamp: A19 60W PAR30 75W</p>		<p>R6VI-ICA Insulation Contact & Air Tight New Construction Incandescent Lamp: A19 60W PAR30 75W</p>	

*Housing available in emergency version. Specify "EM" as suffix.

<u>CATALOG NUMBER</u>	<u>TYPE</u>
<u>PROJECT</u>	

6" PREMIUM LINE VOLTAGE DOWNLIGHT TRIM **R6VT-60-S**

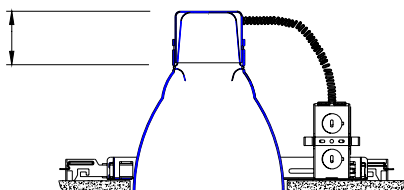

Socket cup adds a maximum of 2 1/8" to the height of the trim when used with frame in kits.