


|                       |             |
|-----------------------|-------------|
| <b>CATALOG NUMBER</b> | <b>TYPE</b> |
| <b>PROJECT</b>        |             |

**LINEAR SYSTEM – HALOGEN TRACK FIXTURE**

**MODEL SF-212**



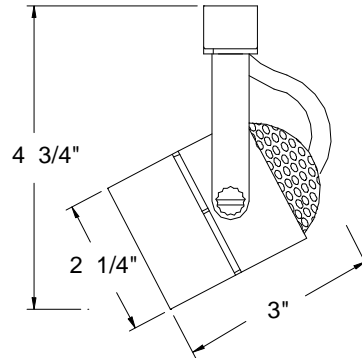



| Ordering Matrix |        |        |                 |  |
|-----------------|--------|--------|-----------------|--|
| Model           | Series | Finish | Accessories     |  |
|                 |        |        |                 |  |
| SF              | 212    | BK WT  | See table below |  |

Ordering Example (model – series – finish + optional accessory): SF-212-BK

| Product Details     |   |
|---------------------|---|
| <b>Description:</b> | Low voltage track head utilizing precise MR16 lamps. Specifically designed small sized fixture for use with the W.A.C. Linear System.   |
| <b>Materials:</b>   | Die-cast aluminum track head with polycarbonate track adaptor. Bi-pin ceramic socket with 18 gauge Teflon insulated wires and fiberglass sleeves. Clear glass lens. Spring tension ring to retain lens. |
| <b>Aiming:</b>      | 350° horizontal rotation and 90° vertical aiming. Yoke style aiming allows easy and fine adjustment to the desired angle. The aiming screw may be tightened to firmly hold vertical aiming angle.       |
| <b>Lamping:</b>     | MR16 lamp, 50w max. The SF-212 is suitable for 12v or 24v lamps. Lamps sold separately.   |
| <b>Finish:</b>      | Abrasion resistant Black (BK) or White (WT) paint finish.   |
| <b>Listing:</b>     | UL & CUL Listed. 5 year W.A.C. Lighting product warranty.   |

| Specification Features  |
|---|
| <ul style="list-style-type: none"> <li>The supplied clear glass lens can be replaced with one lens accessory such as a colored dichroic lens, UV filter lens, etc.</li> <li>Can use 12 volt or 24 volt lamps, dependant on Linear System transformer. Transformer and Linear System track is ordered separately.</li> </ul> |

| Accessory Lenses (ordered separately):   |   |
|--|---|
| <b>LENS-16-UVF</b><br>UV Filter Lens<br>  | <b>LENS-16-COLOR</b><br>Colored Lenses<br>AMB=Amber BLU=Blue GRN=Green<br>RED=Red YEL=Yellow<br> |
| <b>LENS-16-DIC-COLOR</b><br>Dichroic Lenses<br>AMB=Amber BLU=Blue GRN=Green<br>RED=Red YEL=Yellow<br> | <b>LENS-16-FR</b><br>Frosted Glass Lens<br>  |