


## 24V MAGNETIC TRANSFORMER

## MODEL SRT-500M-24V

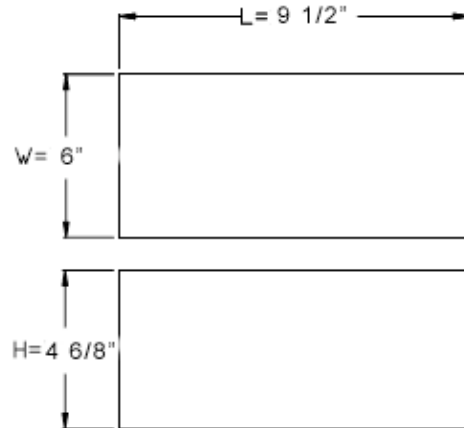

### Ordering Matrix

Model	Finish	Accessories
SRT-500M-24V	BK	See table below

Ordering Example (*model-finish*) : SRT-500M-24V

### Product Details

<b>Description:</b>	Short Circuit Protection. Thermal Protection. Boost Top Option 500 watt for circuit . Suitable for damp locations
<b>Catalog Number:</b>	500M = 500 watt ; M = Magnetic 24V = 24 Volt
<b>Input:</b>	120V (60Hz) 4.2A
<b>Output:</b>	24V AC
<b>Max Load:</b>	500W ( 1 x 500W circuit), 20.8A
<b>Booster</b>	26V, 28V, 30V AC
<b>Transformer Frequency:</b>	60 Hz
<b>Dimming:</b>	Dimmable with magnetic dimmers. Dimmers should always be installed on the primary side of the transformer.
<b>Listing:</b>	U.L. listed, File Number E223916.

### Specification Features

- **Wiring:** Knock out holes on both sides, for convenient wiring. Input lead wire length is 6". Output screw terminals for tight wire connections.
- **Dimming:** Use magnetic low volt dimmers. Dimmers are installed on primary wiring side.
- **Protection:** Automatic resetting thermal protector on the primary side. Magnetic transformers feature "push to reset" circuit breaker.
- 5 year WAC Lighting product warranty.