





CATALOG NUMBER	TYPE
PROJECT	

COMPACT FLUORESCENT TRACK LUMINAIRES

MODEL W239E-HS

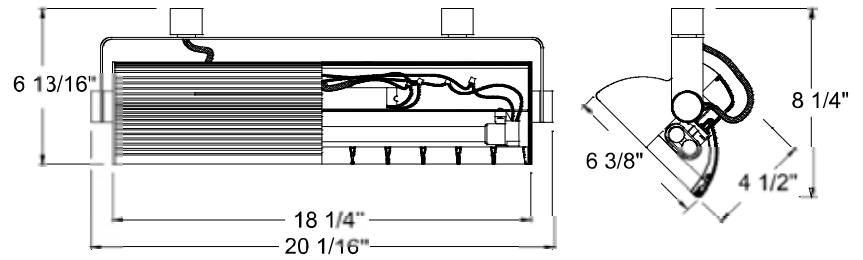

Catalog Information

2-WIRE (L)	3-WIRE (H)	WIDE 2-WIRE (J)	LAMP TYPE / WATT	FINISHES
			(2) 39W Biax®	Black, White
LTK-W239E-HS	HTK-W239E-HS	JTK-W239E-HS		

Product Features

- Description:** Wall wash compact fluorescent track fixture, employs two 39W* lamps, with built in electronic ballast. Fixture is not supplied with a louver.
- Lamp:** Houses two compact fluorescent Biax® lamps, not supplied.
- Aiming:** Permits 180° Vertical aiming.
- Ballast:** High power factor electronic.
- Compatible:** L, H, J and J2 track models in addition to fitting our own tracks, are retrofitable to other manufacturers original tracks (consult factory for specific brand names).
- Special Application:** The J style fixture may be installed on J2-style two circuit track with the addition of the J-CLIP.
- Socket:** 2G11 four pin base.

Engineering Data

Input Voltage	120V 50/60 Hz
Operating Input Power (W)	89W
Input Current (A)	0.80 Amp
Power Factor	0.93
Protection: Open Lamp / Shorted Lamp	Yes
Ballast Min. Starting Temp.	-20°F
Ballast Factor (%)	105%

* Watts and engineering data based on GE Biax® lamps

Options/Accessories

Aluminum louvers are available in Black (L239-BK), White (L239-WT), and Specular Clear (L239-CL).

Compact Fluorescent Brand Name Cross-Reference

GE	Osram/Sylvania	Philips
Biax®	Dulux®L	PL
F39/36BX	FT36DL	PL-L36W
Base style 2G11		

Material

Extruded aluminum housing with specular aluminum reflector, and steel yoke.

Listings

UL, CUL Listed