

RUBIX - model: WS-W25

LED Wall Mount

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in reflector for superior optics; An appealing cylindrical profile with a powerful LED down light perfect for accent and wall wash lighting.

FEATURES

- Mounts up or down
- IP65 Rated, ETL & cETL Wet Location listed
- Die-Cast aluminum construction
- Universal voltage Input (120V - 277V)
- Dimming: ELV (120V) or 0-10V

SPECIFICATIONS

Construction: Aluminum with etched glass

Power: Integral driver in luminaire, 120V - 277V input

Light Source: High output LED

Mounting: Mounts directly to junction box

Dimming: 0-10V Dimming: 100%-10%

ELV Dimming: 100%-15% (120V only)

Finish: Brushed Aluminum (AL), Black (BK), Bronze (BZ), Graphite (GH), White (WT)











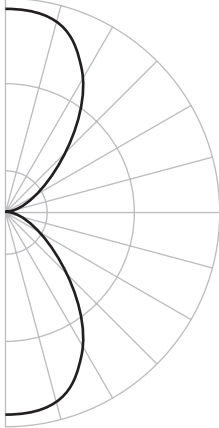
Color Temp: 3000K

CRI: 90

Rated Life: 70,000 hours

Standards: IP65 Rated, ETL & cETL Wet Location listed, Title 24 JA8-2016

Compliant, Dark Sky friendly

	Beam	Photometry	Voltage	Watt	Lumens	Finish
 <p>Single Light</p>  <p>WS-W2504 Dark Sky Friendly</p>	86°		120V - 277V	16W	945	<p>AL Brushed Aluminum </p> <p>BK Black </p> <p>BZ Bronze </p> <p>GH Graphite </p> <p>WT White </p>
 <p>Double Light</p>  <p>WS-W2505</p>	86°		120V - 277V	30W	1890	

-

Example: **WS-W2504-GH**

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585